

Calendar	11-2
Opening Calendar	11-2
Creating Schedule Events	11-2
Setting Day Off	11-4
Viewing/Editing Schedule Events	11-4
Calendar Functions	11-5
Alarms	11-6
Setting Alarm	11-6
Calculator	11-7
Notepad	11-8
Notepad Functions	11-8
Voice Recorder	11-9
Bar Code Reader	11-9
Scanning Barcodes	11-9
Viewing/Editing Scanned Data	11-10
Using Barcode Data	11-11

Calendar

View by day, week or month; set Alarms for events.

Opening Calendar

1 

Current month appears.

- When a date with schedule events is selected, up to four events appear.
-  or  to display previous/next month calendar.
- To switch Monthly/Weekly view:
 P.11-5



One Month Window

Note

- Alternatively, **Main Menu** ► **Tools** ► **Calendar**.

Creating Schedule Events

Save up to 100 entries.

1 

2  to highlight a date →

 [Menu] → *New Entry*



3 Follow the steps below

Item	Operation/Description
Summary	Enter a content > Enter title
Category	Select an event type; icon appears in Standby > Select category
Start	Set date and time the schedule event starts/ends
End	> Enter date → Enter time
Description	Enter event description > Enter a content in detail

Item	Operation/Description
Repetition	Set entry to appear again at regular Intervals > Select a repetition (→ Enter repeating time)
Reminder	Set schedule alarm time > Select an alarm type
Location	Enter location > Enter location
Schedule Tone	Set schedule alarm ringtone > <Schedule Tone> or <i>Ring Songs&Tones</i> or <i>Music</i> → Highlight a file → [Set]
Schedule Volume	Set schedule alarm volume > [Volume] to adjust volume
Notification Light	Set schedule alarm notification light color > Select a color or <i>OFF</i>

4 [Save]

Schedule Icon

Selected icon in Category appears in Standby.

Example: [Meeting], [Anniversary], [Birthday]

- If nothing selected, [None] appears.

Copy Protected Files

- When set as Schedule Tone, license expiry, or inserting a different USIM Card may reset default.
- Limited use files cannot be set as Schedule Tone.

Note

- Schedule events between 00:00 on 2008/01/01 and 23:59 on 2099/12/31 can be saved on 831P.

At Reminder Time

Schedule Tone sounds and Notification Light flashes.

- 1 When Schedule Tone sounds, [Green Circle] Schedule Tone stops and Schedule Event List appears.
- 2 [Green Circle] to view details

Canceling Schedule Tone

- [Eye] to return to Standby.
- Press [Stop] to return to previous menu.
- Press any key except for [Eye], [Stop], [View] or [Green Circle] to cancel Schedule Tone without returning to Standby. Press [Green Circle] to view detailed schedule.

Note

- Schedule Tone does not sound in the following cases:
 - During a call (Notification appears and 831P vibrates)
 - In Manner Mode (Manner Mode settings take priority)
 - When handset power is turned off
 - For entries invalidated by Time Correction

Setting Day Off

- Day Off dates appear in red.

- 1 
- 2 (Highlight a date →)  [Menu] → *Set Day Off*
- 3 **Specify Day of Week**
Weekly (→ Repeat: Highlight a day →)* →
 [OK]

* To cancel selection, press

Specify Current Date

*Today** → *Once* or *Yearly*

* To cancel selection: *Reset Holiday*

Reset All

Reset All →

Viewing/Editing Schedule Events

- 1  → Select a date



Schedule Event List

- 2 Select a schedule event
Detailed schedule appears.
 -  to switch Schedule tab and Contents tab.
- 3  [Back] to exit



Schedule Event Details

Editing Schedule Events

After Step 1, highlight an event → [Menu] → *Edit* → Follow the steps (☞ From Step 3 on P.11-2)

Tip

- Infrared (☞ P.9-3)

Calendar Functions

From ▶ [Menu]

Switch Calendar View

<Default> One Month

> [Menu] → *View Format* → *One Month* or *One Week*

- Select *One Week* view to see daily schedules.

Search Specific Day

> [Menu] → *Go to Date* → Enter a date

Set Week Start Day

> [Menu] → *Start Week From* → Select a day

Delete Schedule Events

> Follow the steps below

Item	Operation/Description
Delete	> Select a date → Highlight an event → [Menu] → <i>Delete</i> → [OK]
Delete Scheduled Events*	> Highlight a date → [Menu] → <i>Delete</i> → <i>Day</i> → [OK] → [OK]

Item	Operation/Description
Delete Past Events*	> Highlight a date → [Menu] → <i>Delete</i> → <i>Past</i> → [OK] → [OK]
Delete All Events	> [Menu] → <i>Delete</i> → <i>All</i> → [Menu] → [YES] → Enter Phone Password

* Repetitive entries cannot be deleted

Calendar Memory Status

> [Menu] → *Memory Status*

Alarms

When scheduled time arrives, alarm tone sounds and animation appears on Display. Notification Light illuminates.

Setting Alarm

Set up to five alarms. Alarm Tone sounds at the specified time once, everyday or weekly as set.

Main Menu ► Tools ► Alarms

1 Select an alarm



2 Follow the steps below

Item	Operation/Description
Alarm ON/OFF	Activate or cancel Alarm > ON or OFF
Time	Set Alarm time > Enter time

Item	Operation/Description
Repetition	Select repetition > Select a repetition (→ For Weekly , select a day (Repeat as required) → [OK])
Alarm Tone*1	Set Alarm Tone sound > <Alarm Tone> or Ring Songs&Tones or Music → Highlight a file*2 → [Set]
Set Alarm Snooze	Alarm Tone sounds for 60 seconds, repeating up to five times at specified intervals > ON or OFF (→ For ON , enter interval)
Alarm Volume	Set Alarm Tone volume > [] to adjust volume
Pictures	Select image to appear > Highlight a still image → [Set]
Set Alarm Vibration	Select Vibration type > Select pattern or OFF
Notification Light	Select Notification Light color > Select a color or OFF
Set Alarm Priority	Set Manner Mode or Alarm priority > Manner Mode Prioritized or Alarm Prioritized

*1 Copy Protected Files (P.8-4)

*2 When selecting an SMC file, highlight a Play Point → [Set]

3 [Save]

appears in Standby when Alarm is set.

At Alarm Time

Alarm Tone sounds, Notification Light flashes and image appears on Display.

- 1 Press any key
Alarm stops and confirmation window appears.
(When pressing , confirmation does not appear.)
 - Stops automatically after 60 seconds of inactivity.

Canceling & Reactivating Alarm

Main Menu ► **Tools** ► **Alarms** ► Highlight an alarm
►  **[Menu]** ► **Alarm ON** or **Alarm OFF**

- Activate a canceled Alarm to apply previous settings.
-  appears for set alarms;  for unset/canceled ones.

Snooze Function

If **ON**, press any key except ; confirmation appears. To cancel Alarm, press  **[Stop]**.

- When pressing  to stop alarm, confirmation does not appear. (Snooze function is still active.)

Note

- Alarm Tone does not sound in the following cases:
 - During a call (notification appears and 831P vibrates)
 - In **Manner Mode Prioritized** (Manner Mode settings take priority)
 - When handset power is turned off
 - For entries invalidated by Time Correction

Calculator

Main Menu ► **Tools** ► **Calculator**

Operation	Assigned Key
Number (0 -9)	 - 
+	
-	
x	
÷	
=	
Decimal point	
Clear	 OR 
Toggle + and -	



Entering Negative Numbers

Enter a number, then press  to toggle negative/positive value.

Example


$-17+28.5=11.5$



Notepad

Main Menu ► Tools ► Notepad

- 1 [Menu] → *New*
- 2 Enter text
New note is added to the top of the list.
 - Up to 64 characters can be entered.

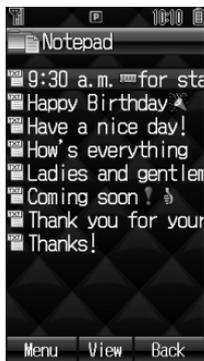

Notepad List Window

Notepad Functions

From ► Main Menu ► Tools ► Notepad

■ Edit Notes

- > Select a note → [Edit] → Edit text
- Edited note is overwritten.

■ Delete Notes

- > Highlight a note → [Menu] → *Delete* → *One* or *All* → [YES] → When selecting *All*, enter Phone Password

■ Note Property

- > Highlight a note → [Menu] → *Property*

■ Insert Notes into Message Text

- > Highlight a note → [Menu] → *Send* → *Send via S! Mail* or *Send via SMS* → Enter mail address, etc. → [Send]

Voice Recorder

Record voice memos of up to 60-seconds.

- Recording during a call: P.2-9

Main Menu ► Tools ► Voice Recorder

- 1 Recording starts.
- 2 to stop recording
 - To play:
- 3 [Save]
Recorded sounds are saved in Ring Songs&Tones folder.



Note

- Sounds recorded by Voice Recorder cannot be set as Alarm, Ringtone or Schedule Tone.

Bar Code Reader

Scan barcodes (JAN) or QR Codes with built-in camera.
Access websites, send messages, etc. from QR Codes.

JAN Codes

JAN Code is a one-dimensional bar code denoting numerals with bars and spaces of different widths.

QR Codes

QR Code is a two-dimensional bar code containing information.

Example: SoftBank mobile phones



Scanning Barcodes

- Up to ten items can be saved.
- For split data, up to 16 QR Codes can be scanned at a time and saved as one item.

Main Menu ► Bar Code Reader ► Scan Barcodes

- 1 Frame barcode in the center of Display
 - To adjust display brightness: or
 - To zoom:
 - To use Focus Lock:

- 2  Scanning starts, and scanned results appears when completed.
- For split data,  → Repeat Step 1 and 2
- 3  [Save]
- To start over:  →  → Go to Step 2



Scanned Results Window

Note

- 831P cannot read barcodes or two-dimensional codes other than JAN/QR Codes.
- If recognition stalls, adjust display brightness and retry.
- Brightness can be adjusted while scanning; however, zoom level can not be changed.
- Saved items are automatically named "yymmdd_hhmmss" unless changed. (yy: year, mm: month, dd: day, hh: hour, mm: minute, ss: second)
- When memory is full, warning appears. Delete old data.
- Barcodes may not be correctly read owing to scratch, dirt, damage, quality of printed material, light reflection, or QR code version.

Viewing/Editing Scanned Data

Main Menu ► Bar Code Reader ► Saved Data List

1 View Saved Data

Select an item

Edit TitleHighlight an item →  [Menu] → *Rename* → Edit title**Deleting Saved Data**In Step 1, highlight an item →  [Menu] → *Delete One* → 

Using Barcode Data

From ► **Main Menu** ► **Bar Code Reader**
► **Saved Data List**

■ Using URLs/Mail Addresses/Phone Numbers

> Select an item → Select an item (See below)

Item	Operation/Description
URL (http:// or https://)	Connect to websites; add to Bookmarks (☞ P.13-8)
URL (rtsp://)	Streaming; add to Bookmarks
Mail Address	Create S! Mail (☞ P.12-4); save to Phone Book (☞ P.4-3)
Phone Number	Make calls; create messages* (S! Mail: ☞ P.12-4/ SMS: ☞ P.12-8); save to Phone Book (☞ P.4-3)
Phone Book Data (MEMORY: text)	Save to Phone Book <ul style="list-style-type: none">● Save MEMORY: text only● Saved to Phone regardless of Save Settings selection

* SoftBank handset numbers only

■ Insert Scanned Text into Messages

> Select an item → ☒[Menu] → **Paste Data & Create Mail** → **S! Mail** or **SMS**

■ Copy Text from Scanned Results

> Select an item → ☒[Menu] → **Copy** → Follow the steps below

Item	Operation/Description
Copy All Text	> ☒[All] → ●
Copy Selected Text	> Place cursor before (or after) text to copy → ● → Place cursor after (or before) text to copy → ●

11

Tools