

Calendar & Tasks	9-2
Calendar	9-2
Tasks	9-4
Alarms	9-6
Using Alarms	9-6
Wakeup TV	9-8
Using Wakeup TV	9-8
Calculator	9-10
Using Calculator	9-10
Expenses Memo	9-11
Adding Expenses	9-11
Osaifu-Keitai®	9-12
Osaifu-Keitai® (Japanese)	9-12
Locking IC Card	9-13
Simulated Call	9-15
Faking Incoming Calls	9-15
Stopwatch	9-16
Using Stopwatch	9-16
Countdown Timer	9-17
Using Countdown Timer	9-17
World Clock	9-18
Opening World Clock	9-18
Hour Minder	9-19
Using Hour Minder	9-19

Pedometer	9-20
Using Pedometer	9-20
Compass	9-22
Using Compass	9-22
S! GPS Navi	9-23
Using S! GPS Navi	9-23
Document Viewer	9-25
Opening PC Documents	9-25
Notepad	9-26
Saving Text	9-26
ASCII Art	9-27
Using ASCII Art	9-27
Voice Recorder	9-28
Recording/Playing Voice	9-28
Scan Barcode	9-29
Scanning Barcodes	9-29
Create QR Code	9-30
Creating QR Codes	9-30
Scan Card	9-31
Scanning Business Cards	9-31
Text Scanner	9-32
Scanning Text	9-32
Additional Functions	9-33
Troubleshooting	9-47

9

Handy Extras

Calendar

Opening Calendar

- 1 → **Tools** → → In PIM/
Life menu, **Calendar** →



Calendar Window

Key Assignments

	Open previous page		Toggle view
	Open next page		Select week ^{2,3}
	Go to (Today) ¹		Select date ³
	Help		

¹In 6Month View, the current month is selected.

²In Week View, select time block.

³In 6Month View, select month.

Saving Schedules


Follow these steps to save subject, start/end date/time, Alarm and schedule details. Either Subject or Description must be saved per entry.

- 1 In Calendar window, select date →




- 2 **<Add New Entry>** →

- 3 Enter subject →

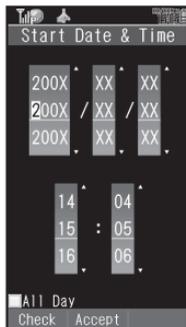

- 4 Enter start date/time →



- 5 **End:** → → Enter end date/time →

- 6 **Alarm:** →

- 7 **Alarm Time:** → → Select time → →

- 8 **Description:** → → Enter schedule details →

- 9 → **Saved**

All-Day Schedule

In → → From

Custom Alarm Time

In , **Alarm Time:** → → **Other** → → Enter date/time → → → From

Advanced

- Changing default view
- Jumping to specified date
- Changing date color
- Selecting task view option
- Adding stamps (Month View)
- Hiding schedules
- Saving additional holidays
- Removing/restoring preset holidays
- Setting Category/Location
- Saving repetitive schedules (And more on P.9-33 - 9-34)

At Alarm Time

Alarm activates; sounds/vibrates by related settings.



Stopping Alarm to Return to Standby

- While Alarm sounds/vibrates, press or .

Stopping Alarm to Open Schedule

- While Alarm sounds/vibrates, press a key other than , or .

When Another Function is Active

- Alarm may not activate until handset returns to Standby.

Incoming Calls

- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

Opening Schedules/Tasks

- In Calendar window, select date



Schedule List

- Select schedule or task
- Standby returns**

Opening Task List

In , select task **Go to Tasks**

Accessing Secret Entries

[Calendar Window] **Unlock Temporarily** **Enter Handset Code**

Opening Related Message

Open schedule-related messages saved from Messaging message list.

- In schedule list, select schedule
- Related Mail**
 - Related message opens.
 - To return to schedule window, press .

Deleting Message from Schedule

After , **Related Mail:** **Yes**

Deleting Schedules

One Entry

- In schedule list, select schedule
- Delete**
- This Appointment** **Yes**

All Entries of the Day

- In Calendar window, select date
- Delete** **All This Day** **Yes**

Advanced

- Searching entries
- Checking memory status
- Deleting all entries
- Deleting entries by specifying week (Week View)
- Deleting entries by specifying month (Month/3Month View)
- Deleting entries in six months (6Month View) (P.9-34 - 9-35)

Tasks

Saving Tasks


Follow these steps to save subject, due date/time, Alarm and task details:
Either Subject or Description must be saved per entry.

- 1 → **Tools** → → In PIM/
Life menu, **Tasks** →



- 2 **<Add New Entry>** →


- 3 **Enter subject** →

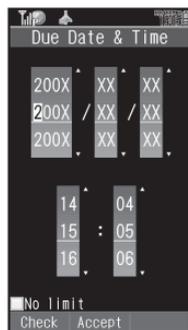

- 4 **Enter due date/time** →



- 5 **Alarm:** →



- 6 **Alarm Time:** → → **Select time** → →

- 7 **Description:** → → **Enter task details** →

- 8 → **Saved**

Task with No Due Date/Time

In , → **From**

Custom Alarm Time

In , **Alarm Time:** → → **Other** → → **Enter date/time** → → → **From**

Advanced

- 1 ● Hiding tasks ● Editing tasks ● Setting priority ● Changing Alarm tone/video & duration ● Changing Alarm volume ● Selecting Vibration option ● Sounding Alarm tone even in Manner mode (P.9-35)

At Alarm Time

Alarm activates; sounds/vibrates by related settings.



Stopping Alarm to Return to Standby

- While Alarm sounds/vibrates, press or .

Stopping Alarm to Open Task

- While Alarm sounds/vibrates, press a key other than , , or .

When Another Function is Active

- Alarm may not activate until handset returns to Standby.

Incoming Calls

- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

Opening Tasks

- ➔ **Tools** ➔ ➔ **In PIM/Life menu, Tasks** ➔



Task List

- Use to open completed or uncompleted task list.

- Select task** ➔



- ➔ **Standby returns**

Accessing Secret Entries

After **1**, ➔ **Unlock Temporarily** ➔

➔ **Enter Handset Code** ➔

Marking Tasks as Completed

After **1**, select task ➔

Deleting Tasks

One Entry

- In task list, select task** ➔

- Delete** ➔

- This Task** ➔ ➔ **Yes** ➔

All Completed Tasks

- In task list,**

- Delete** ➔ ➔ **All Comp. Tasks** ➔ ➔ **Yes** ➔

Advanced

- Searching tasks ● Sorting tasks by priority ● Checking memory status ● Deleting all tasks (P.9-36)

Using Alarms

Setting Alarm

Follow these steps to set Alarm to sound at a specific time on a specific day of the week:

Set Snooze (Alarm repeats at set interval), Alarm Volume and Duration.

- 1 → **Tools** → → **In PIM/Life menu, Alarms** →



Alarm List


- 2 --:-- → → **Enter hour (24-hour format)** → **Enter minutes** →



- 3 **Repeat:** →



- 4 **Selected Days** →



- 5 **Select day** → (/✓) → **Complete selection** →

- 6 **Snooze:** →

- 7 **Select interval** →
• For custom intervals, select *Other*.

- 8 **Alarm Volume:** →

- 9 **Adjust level** →

- 10 **Duration:** →

- 11 **Select time** →
• For custom Duration, select *Other*.

- 12 → **Saved**
• For more settings, repeat 2 - 12.

- 13 → **Alarm setting ends**

Activating Alarm Once or Daily

In 4, *Once* or *Every Day (All)* →
→ **From** 5

Selecting/Canceling All Days

In 5, → *Check All* or *Uncheck All*
→

Excluding Holidays

In 5, select day → (/✓) → **Complete selection** → *Except Holidays* → → → **From** 5

Advanced

- 1 ● Editing entries ● Saving entry name ● Changing Alarm tone/video ● Setting handset to vibrate at Alarm Time ● Sounding Alarm tone even in Manner mode ● Activating Alarm based on World Clock time (P.9-36)

At Alarm Time

Alarm activates; sounds/vibrates by related settings.



Stopping Alarm

- Press a key.

When Another Function is Active

- Alarm may not activate until handset returns to Standby.

Incoming Calls

- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

When Snooze is Set

Alarm repeats at the set interval. Other Alarms do not activate while handset is Snoozing.

Canceling Snooze

While Snoozing, → Yes →

- Snooze is automatically canceled after a period of time.

Canceling Alarm

1 In Alarm list, select entry →

2 **Switch Off** →

- Reactivate entry to use the same settings.

Reactivating Entry

In , **Switch On** →

Deleting Alarm

One Entry

1 In Alarm list, select entry →

2 **Reset Alarm** →

3 **Yes** →

All Entries

1 In Alarm list, select entry → → **Clear All** →

2 **Enter Handset Code** → → **Yes** →

Using Wakeup TV

Setting Wakeup TV

Follow these steps to activate TV at a specific time on a specific day of the week:

- Complete TV Area Setup beforehand.
- TV may not activate in poor signal conditions.

- 1 → **Tools** → → In PIM/
Life menu, **Wakeup TV** →



Wakeup TV List


- 2 --:-- → → Enter hour
(24-hour format) → Enter
minutes →



Wakeup TV Menu

- 3 **Repeat:** →

- 4 **Selected Days** →



- 5 **Select day** → (/✓) →
Complete selection →

- 6 **Channel:** →

- 7 **Select channel** →

- 8 → **Saved**

- For more settings, repeat 2 - 8.

- 9 → **Wakeup TV setting ends**

Activating TV Once or Daily

- In 4, **Once or Every Day (All)** →
→ **From**

Selecting/Canceling All Days

- In 5, → **Check All or Uncheck All**
→

Excluding Holidays

- In 5, select day → (/✓) →
Complete selection → **Except**
Holidays → → → **From**

Canceling Alarm

- Alarm activates at Wakeup TV time. To cancel Alarm, follow these steps:
[Wakeup TV Menu] **Alarm On/Off:** →
 → **Off** → → **From**

Adjusting Alarm Volume

- [Wakeup TV Menu] **Alarm Volume:** →
 → **Adjust level** → → **From**

Advanced

- Editing entries
- Changing Alarm tone/video
- Sounding Alarm tone even in Manner mode (P.9-37)

At Wakeup TV Time

TV activates after Alarm.



Stopping Alarm Instantly

- While Alarm sounds/vibrates, press a key.

When Another Function is Active

- TV may not activate depending on the function.

After TV is On for a Period of Time

- Confirmation appears. Choose **Yes** and press to exit TV.

Canceling Wakeup TV

1 In Wakeup TV list, select entry ➔

2 *Wakeup TV Off* ➔

- Reactivate entry to use the same settings.

Reactivating Entry

In , *Wakeup TV On* ➔

Deleting Wakeup TV

■ One Entry

1 In Wakeup TV list, select entry ➔

2 *Reset Alarm* ➔

3 *Yes* ➔

■ All Entries

1 In Wakeup TV list, select entry ➔ ➔ *Clear All* ➔

2 Enter Handset Code ➔
➔ *Yes* ➔

Using Calculator

- 1 ➔ **Tools** ➔ ➔ In PIM/
Life menu, **Calculator** ➔



Calculator Window

- 2 Use Keypad to enter digits
➔ **Calculate**
- 3 ➔ **Calculator ends**

Key Assignments	
+ (Add)	
- (Subtract)	
x (Multiply)	
÷ (Divide)	
= (Sum)	
C-CE (Clear)	
CM (Clear Memory)	
RM (Recall Memory)	
M+ (Add to Memory)	
. (Decimal)	
+/- (Positive/Negative Value)	
% (Percentage)	

Memory Calculation

- Clear Memory before starting new Memory calculations.
- Numbers saved in Memory remain until handset power is turned off.

Incoming Calls

- Calculations are not affected. End the call to return to Calculator.

Using % Function

Use to find definite percentage of a known value.

Example: Calculate 30% of 800,000

Enter **800,000** ➔ **x** ➔ **30** ➔ **%**

- **240,000** appears.

Advanced

- Copying calculation results ● Changing exchange rate for currency conversion ● Converting currencies (P.9-37)

Adding Expenses

Entering Expenses

- 1 Enter amount →



- 2




- 3 Select Category → → → Saved

Saving under Custom Category


In ☺, Other → → Enter name →

Checking Entries

- 1 → Tools → → In PIM/
Life menu, Expenses Memo
→



- 2 Totals →



Expenses Memo List

- 3 → Standby returns

Saving Entries to Notepad

[Expenses Memo List] → Save to
Notepad →

- All expense details are saved as a single entry.

Deleting Entries

- One Entry

- 1 In Expenses Memo list,
select entry →

- 2 Delete Item → → Yes →

- All Entries

- 1 In Expenses Memo list,
→ Delete All →

- 2 Enter Handset Code →
→ Yes →

Advanced

- Changing Category of saved entry ● Changing amount ● Renaming Categories (P.9-37)

Osaifu-Keitai® (Japanese)

Osaifu-Keitai® describes IC Card-equipped handsets that support e-money or credit functions/services. Osaifu-Keitai® encompasses a range of IC Card-based services on FeliCa-compatible SoftBank handsets. 932SH supports Osaifu-Keitai®. To use e-money, e-ticketing and reward points, etc., hold handset over a compatible reader/writer at shops, restaurants, and other retail outlets, etc.

Basics

Before using Osaifu-Keitai®, activate Lifestyle-Appli, complete registration, customize settings and charge accounts.

Starting Lifestyle-Appli

- ☐ ➔ *Tools* ➔ ☐ ➔ In PIM/Life menu, *Osaifu-Keitai* ➔ ☐ ➔ *Lifestyle-Appli* ➔ ☐ ➔ Select application ➔ ☐

Lifestyle-Appli Precautions

- Contact Osaifu-Keitai® service providers for Lifestyle-Appli registration and usage details.
- Keep service passwords/customer service contact information, etc. in a separate place.


Using Osaifu-Keitai®

Follow these steps to conduct a transaction:

Example: Making an electronic payment

- Lifestyle-Appli activation is not necessary.
- Transactions are possible even when handset power is off (if battery is adequately charged).
- Calls/Internet transmissions do not affect transactions.

- 1 Place  logo over reader/writer ➔ Confirm scan results

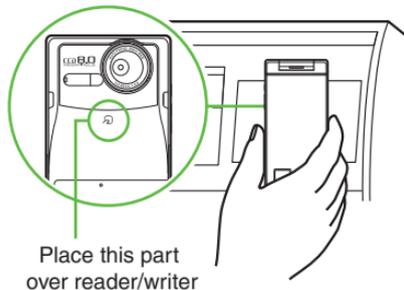

Place this part over reader/writer

- Align handset parallel to reader/writer.

Important Osaifu-Keitai® Usage Note

SoftBank is not liable for damages resulting from accidental loss/alteration of IC Card data/settings.

When Placed Over Sensor

- If recognition is slow, move handset around slightly.
- Handset may respond automatically for some services.

Advanced


- ☞ Enabling to view e-money balances
- Checking e-money balance on External Display
- Moving applications up/down Balance Info list
- Removing applications from Balance Info list (P.9-38)

Locking IC Card


IC Card Lock

Use this function to restrict access to/prevent unauthorized use of Osaifu-Keitai® on handset.

- 1 → **Tools** → → **In PIM/Life menu, Osaifu-Keitai** →



- 2 **IC Card Settings** →



IC Card Settings Menu

- 3 **IC Card Lock** → → **On** →

- 4 **Enter Handset Code** →
→ **Yes** →

Canceling IC Card Lock

- In , **IC Card Lock** → → **Off** →
→ **Enter Handset Code** →

Remote Lock

Disable Osaifu-Keitai® remotely by mail or phone.

Mail Remote Lock	Send mail to activate Remote Lock
Call Remote Lock	Call from a specified phone to activate Remote Lock

Mail Remote Lock

Preparation on Handset

- 1 In **IC Card Settings** menu,
Remote Lock → → **Enter Handset Code** →



- 2 **Mail Remote Lock** →



Mail Remote Lock Menu

- 3 **Remote Lock PW** →

- 4 **Enter password** →

- 5 **Switch On/Off** →

- 6 **On** → →

Canceling Mail Remote Lock

- In , **Off** → →

Activating Remote Lock via Mail

If handset cannot receive mail IC Card Lock is not set.

- 1 **Send S! Mail or e-mail to handset with password as subject**

- After handset receives message, IC Card Lock is set and notice is sent as a reply.

Advanced

- Customizing handset response to reader/writer commands ● Opening IC Card properties ● Changing IC Card Lock notice recipient ● Changing required Missed Call count for Call Remote Lock ● Restoring default Osaifu-Keitai® settings (P.9-38)

Call Remote Lock

■ Preparation on Handset

- 1** In IC Card Settings menu, **Remote Lock** → → Enter Handset Code →




- 2** **Call Remote Lock** →



Call Remote Lock Menu

- 3** **Phone No. to Lck 1** or **Phone No. to Lck 2** →



- 4** **Phone Book** → → **Select entry** → → **Select phone number** →

• Select *Phone Number* to enter directly.

- 5** **Switch On/Off** →

- 6** **On** → →

Enabling Activation via Public Phone

In **Set Public Phone** → → **On**

→ → **From**

Canceling Call Remote Lock

In **Off** → →

■ **Activating Remote Lock via Phone**
If handset cannot receive calls IC Card Lock is not set.

- 1** **Using one of the specified phones, call handset**

• Send Caller ID.

- 2** **Handset receives call** → **End the call**

• The call is recorded as a Missed Call.

- 3** **Within three minutes, repeat** **1** - **2** twice



• After the third Missed Call, IC Card Lock is set; a message announces Remote Lock activation. Confirm the message and end the call.

If Series is Interrupted by Another Call

• Missed Call count is reset. Start over from the beginning.

Faking Incoming Calls

Handset rings to emulate an incoming call.

- Save name and phone number to show as Caller ID.
- Ringer may be muted by handset settings. To override Silent setting, see **P.9-39**.

Setting Simulated Call

- 1** → **Tools** → → **In PIM/Life menu, Simulated Call** →



Simulated Call Menu

- 2** **Switch On/Off** → → **On** →

- 3** **Set Caller** →



- 4** **Name:** → → **Enter name** →

- 5** **Phone Number:** → → **Enter phone number** → →

- 6** **Assign Tone** → → **Select tone/file** →

- 7** → **PIM/Life menu returns**

When Name and Phone Number are Unset

- Handset rings with Caller ID "Withheld."

Canceling Simulated Call

[Simulated Call Menu] **Switch On/Off**
→ → **Off** → →

Setting Wait Time

[Simulated Call Menu] **Receive Timing**
→ → **Select time** → →

Using Simulated Call

- 1** **(Long)**
- Available regardless of Display position.
 - Handset rings and incoming Voice Call window opens.
 - Ringtone stops after a period of time.

- 2** **In incoming Voice Call window, press**

- Voice Call window opens. (Softkeys are dummies.)

- 3** → **Simulated Call ends**

When Receive Timing is Not Immediately

- Press or during wait time to cancel Simulated Call activation.
- Simulated Call activation is canceled by incoming calls, Alarms, etc. during wait time.

Advanced

- Starting via Simulated Call menu • • Clearing caller information • • Overriding Silent volume setting (**P.9-39**)

Using Stopwatch

Stopwatch stops when battery runs low.

- 1  ➔ **Tools** ➔  ➔  ➔ **Clock/Gauge** ➔ **Stopwatch** ➔ 



Stopwatch Window

- 2  ➔ **Stopwatch starts**
- 3  ➔ **Stopwatch stops**
 - Press  to resume.
- 4  ➔ **Yes** ➔  ➔ **Stopwatch ends**
 - Records are deleted when Stopwatch ends.

Recording Lap Times

While Stopwatch is running, 

Saving Records to Notepad

After   ➔ **Save to Notepad** ➔ 

Resetting Records


After   ➔ **From** 

Incoming Calls

- Stopwatch is not affected by incoming calls. End the call to return.

Using Countdown Timer

- 1** → **Tools** → → → **Countdown Timer** →



Timer Entry Window

- 2** **Enter minutes** → **Enter seconds** →



Countdown Timer Window

- Press to change time.

- 3** → **Countdown starts**
- Press to stop/resume countdown.

- 4** **Set time elapses** → **Tone sounds**

- 5** → **Yes** → → **Countdown Timer ends**

Using Timer Records

- After **1**, → **Select record** → → → **From** **3**

Resetting Timer

- Stop countdown and**

Incoming Calls

- Countdown is not affected by incoming calls. End the call to return.

When Set Time Elapses

Tone sounds.



Stopping Tone Instantly

- Press or a Side Key. (Tone stops automatically after a period of time.)
- When Timer Time Elapsed during a Call**
- Tone sounds after the call.

Opening World Clock

- 1 → **Tools** → → → **Clock/Gauge** → **World Clock** →



Local Time Zone

World Time Zone

- 2



Set Time Zone Window

- 3 → **Select area** →

- 4 → **World Clock ends**

Advancing One Hour (Daylight Saving)

[Set Time Zone Window]

- To cancel, press .

Adding Custom Time Zone

[Set Time Zone Window] → Enter city name → → + or - → →

Enter time difference →

Opening World Clock in Standby

- 1 → **Settings** → → **In Phone menu, Display** →

- 2 **Standby Display** →



- 3 **Clock/Calendar** →

- 4 **World Clock (L), etc.** →

Using Hour Minder

Setting Hour Minder

Follow these steps to activate the hourly time signal at selected hours:

- 1  ➔ **Tools** ➔  ➔ 
Clock/Gauge ➔ **Hour Minder** ➔ 



Hour Minder Menu

- 2 **Switch On/Off** ➔  ➔ **On** ➔ 

- 3 **Select Time** ➔ 



- 4 **Select hour** ➔  () ➔ **Complete selection** ➔ 

Advanced

-  ● Changing Hour Minder tone/video ● Setting handset to vibrate at Hour Minder Time ● Sounding Hour Minder tone even in Manner mode ● Activating Hour Minder based on World Clock time (P.9-39)

- 5  ➔ **Saved**

- 6  ➔ **Hour Minder setting ends**

Adjusting Hour Minder Volume

- In 2, **Advanced** ➔  ➔ **Volume:** ➔  ➔ **Adjust level** ➔  ➔  ➔ **From** 5

Changing Hour Minder Duration

- In 2, **Advanced** ➔  ➔ **Duration:** ➔  ➔ **Select time** ➔  ➔  ➔ **From** 5


- For custom Duration, select **Other**.

Selecting/Canceling All Hours

- In 4,  ➔ **Check All or Uncheck All** ➔ 

At Hour Minder Time

Hour Minder activates; sounds/vibrates by related settings.



Stopping Tone Instantly

- Press a key.

When Another Function is Active

- Hour Minder does not activate.

Incoming Calls

- Active Hour Minder stops for incoming calls.

Canceling Hour Minder

- 1 In Hour Minder menu, **Switch On/Off** ➔  ➔ **Off** ➔  ➔ 

Using Pedometer

Getting Started

- Count based on a pace of approximately 100 steps per minute over even terrain.
- Accuracy may be affected by course, terrain, walking style, etc.
- Avoid holding the handset; use a body worn case or a strap, or place handset inside a pocket or bag.
 - Avoid sudden/erratic movements.
- Steps are not counted in the following cases:
 - While handset is off
 - For the first few steps
 - While handset vibrates
- Handset use may affect accuracy.
- Use Pedometer only as a rough guide.


Adjusting Counter Sensitivity

- **Tools** → **Clock/Gauge** → **Pedometer** → **Settings** → **Step Sensitivity** → **Select option**
- Select **Low** when steps seem overcounted; select **High** when they seem undercounted.

Saving Body Information

Weight and pace entry required to view full Pedometer data.

- 1 **Tools** → **Clock/Gauge** → **Pedometer**



Pedometer Menu

- 2 **Settings** → **Body Info.**

- 3 Enter Handset Code



Body Info Menu

- 4 **Height** → Enter height

- 5 **Weight** → Enter weight

- 6 **Pace** → Yes or No

- Choose **Yes** to enter pace automatically based on height.

- 7 Enter pace

Editing Body Information

- [Body Info Menu] Select item → Enter value
- For **Pace**, automatic calculation confirmation appears (when height is entered).

Activating Pedometer

- 1 In Pedometer menu, **Switch On/Off**


- 2 **On**

Canceling Pedometer

- In 2, **Off**

Pedometer Indicator


When Pedometer is active, today's step count appears in Standby.



Viewing Step Count Records

1 In Pedometer menu, **Today's Walking** →

2



Steps Window

- Press to toggle daily/weekly view.
- Press to open previous day/week, or to open next day/week.

3 **Select time/date** →

- Hourly/daily step counts appear.

4 → **Standby returns**

Resetting Today's Step Count

In , → **Reset Day's Data** → → **Yes** →

Resetting Log

[Steps Window] → **Walk Data Reset** → → Enter Handset Code → → **Yes** →

- Today's data is also reset.

Setting Targets

Information window opens, etc. when target is achieved for these items:

Steps	Walking Time
Exercise	Calories
Distance	Fat burned

1 In Pedometer menu, **Settings** → → **Target** →

2 **Target Settings** →

3 **Select item** → → **Enter value/time** →

- Other target settings may consequently change.

Editing Targets

[Pedometer Menu] **Settings** → → **Target** → → **Target Settings** → → **Select item** → → **Enter value/time** →

When Target is Achieved

- A tone sounds and Information window opens. (Select **Goal Achievement** and press to open Pedometer Calendar.) Follow these steps to mute achievement tone:

[Pedometer Menu] **Settings** → → **Target** → → **Goal Announce** → → **Off** →

About Exercise (Ex)

- Ex and MET indicate amount and intensity of physical activity, respectively. Ex for walking is calculated by multiplying 3 METs by walking duration (hour).

Advanced

- Changing Pedometer indicator
- Using Pedometer Calendar
- Checking accumulated data
- Resetting accumulated data
- Customizing achievement notice (P.9-40)

Using Compass

Opening Compass

- 1  → **Tools** → 
- 2  **Clock/Gauge** → **Compass** → 



Compass Window

- Compass opens; use as a rough guide.

Adjusting Compass

- 1 In **Compass** window,  → 
 - Follow onscreen instructions.

Compass Indicator

- When map is open, compass indicator appears; follow these steps to hide it:
 -  → **Tools** →  →  **Clock/Gauge**
 - **S! GPS Navi** →  → **NAVI**
 - Settings** →  → **Compass Indicator**
 -  → **Off** → 

Using S! GPS NAVI

Use this GPS navigation service to pinpoint current location, find routes to destinations, and more.

Precautions

- Location Information accuracy may be affected when GPS satellite/radio station signal reception is poor. Use S! GPS NAVI under the open sky.
- SoftBank is not liable for any damages resulting from the provided Location Information.

Positioning

- Pinpoints current location using signals transmitted from GPS satellites.


Location Information Accuracy

- Probable distance from the actual position is classified into three levels, from Accuracy 1 (low) to Accuracy 3 (high).
- A confirmation appears when accuracy level is 1 or 2; follow these steps.

Yes or No →

Starting Navi-Appli

- 1 → **Tools** → → **S! GPS NAVI** →



S! GPS NAVI Menu

- 2 **Navi Appli** →
 - To disable confirmation, press before .

- 3 **Yes** →

Opening Navi Appli List

[S! GPS NAVI Menu] **Navi Appli List**

-
- To activate Navi Appli, select one and press .

Selecting a Navi-Appli for S! GPS NAVI

[S! GPS NAVI Menu] **NAVI Settings** →

- **Select Navi Appli** → → **Select application** →

Pinpointing Current Location

- 1 In S! GPS NAVI menu, **Locate Me** →



- To disable confirmation, press before .

- 2 **Yes** → → **Positioning starts**
 - Map of your current location appears.

Opening Location Log

- 1 In S! GPS NAVI menu, **Location Logs** →
- 2 **Select record** →
 - Details appear.
- 3 → **Menu returns**

Advanced


- Sending current location via mail ● Changing map source URL ● Disabling positioning ● Selecting Location Information transmission option (P.9-40)

Using My Location

Saving Location Information

Follow these steps to save current location as a new entry:

- 1 In S! GPS Navi menu, **My Location List** →



My LocationList Menu

- 2 **New Entry** →
- 3 **Name** → → **Enter name** →
- 4 **Location Info** →
- 5 **From Current Loc.** → → **Positioning complete**
- 6
 - When accuracy level is 1 or 2, choose **No** and press to proceed to .
- 7

Saving as Home

- In , **自宅** → → **From**
- Saving from Location Log**
- In , **From Location Logs** → → **Select record** → →

Opening Entries

- 1 In My LocationList menu, **select entry** →
- 2 **Location Info** →



- 3 → **Details closes**

Deleting Entries

- 1 In My LocationList menu, **select entry**
- 2 → **Delete** → → **Yes** →

Using Location Navi (Japanese)

Locate other S! GPS Navi-compatible handset users or lost handset.

- Location Navi requires a separate contract and initial settings.
- If Double Number is active, service uses Line A regardless of usage mode setting.
- For more about Location Navi, see SOFTBANK MOBILE Corp. Website (P.15-23).

- 1 In S! GPS Navi menu, **Location Navi** →

- Handset connects to the Internet. Follow onscreen instructions.

Advanced

- Using My Location & Location Log Saving Location Log records to My Location Deleting Location Log records (P.9-41)

Opening PC Documents

Supported File Formats:

PDF (.pdf)


Microsoft® Excel® (.xls)

Microsoft® Word (.doc)

Microsoft® PowerPoint® (.ppt)

- Some files may not appear correctly.
- Download files via the Internet.
- When transferring files from PCs, save to corresponding Memory Card folder (P.15-24).

- 1** ➔ *Tools* ➔ ➔ *Doc./Rec.* ➔ *Document Viewer* ➔



- 2** *Select file* ➔

Zooming In/Out with Loupe (Magnifier)
 In open file, (Long) ➔ *Specify portion* ➔ ➔ *Zoom Out or Zoom In* ➔

Key Assignments

	View whole page
	Scroll
	View upper left
	Toggle full screen view on/off
	View upper right
	Zoom out
	Continuous zoom out
	View center
	Zoom in
	Continuous zoom in
	View lower left
	Jump to page
	View lower right
	Open Help
	Next page
	Previous page
	Fit width
	Rotate 90°

Saving Text

New Notepad Entry

- 1 → **Tools** → → → **Doc./Rec.** → **Notepad** →



Notepad List

- 2 **<Add New Entry>** →



- 3 Enter text →
- 4 Select Category → → → **Saved**

Sorting Entries Temporarily

[Notepad List]

- Press repeatedly to toggle sort options (Modified, Created, Category and Accessed).

Changing Landscape Notepad List View


[Notepad List] Select entry → → **Setting/Manage** → → **Landscape Display** → → Select option →

Inserting Notepad Text during Text Entry

In a text entry window, → **Notepad** → → **Call Notepad** → → Select entry →

Opening Notepad

- 1 In Notepad list, select entry →



- 2 → **List returns**

Deleting Entries

■ One Entry

- 1 In Notepad list, select entry →

- 2 **Delete Item** → → **Yes** →

■ All Entries

- 1 In Notepad list, select entry → → **Setting/Manage** →

- 2 **Delete All** → → Enter Handset Code → → **Yes** →

Advanced

- Editing Notepad
- Searching text within all entries
- Inserting Notepad text into message text
- Sending entries via S! Mail
- Creating text files
- Importing text files
- Checking memory status
- Opening properties (P.9-41 - 9-42)

Using ASCII Art

Inserting ASCII Art

- 1 In message text entry window,  **Call ASCII Art**  



- 2 Select entry  



Previewing ASCII Art

- In , select entry  
- Press  to insert ASCII Art.

Editing Entries

- 1   **Tools**     **Doc./Rec.**  **ASCII Art**  



ASCII Art List

- 2 Select entry    **Edit**  

Opening Entries

- In , select entry   **View**  

Adding New Entries

- In , **<Empty>**   **Create ASCII Art**  

Recording/Playing Voice

Recording

- If battery runs low while recording, Voice Recorder shuts off.
- Record conversations during calls via **Record Caller Voice**.

- 1 → **Tools** → → → **Doc./Rec.** → **Voice Recorder** →



Recording Window

- 2 → **Recording starts**

- 3 → **Recording stops**



- For **Extended Voice**, recording is saved automatically.

- 4 **Save** →

Play Before Saving

- In 4, **Playback** → → **Playback starts** → → **Playback stops**

Starting Over

- In 4, → **From** 2

Playback

- 1 In recording window, → **Ring Songs-Tones** →



- 2 **Select file** →

Playing Data Folder Files

- **Data Folder** → → **Ring Songs-Tones** → → **Select file** →

Playback Operations

	Adjust volume
	Pause/resume
	Stop

Advanced

- Saving longer recordings
- Sending Voice files via S! Mail
- Switching storage media (P.9-42)

Creating QR Codes

Create QR Codes from these items on handset:


Phone Book	My Details
Text Input	Ring Songs-Tones
Pictures	Notepad

Large items are divided into multiple QR Codes.

Procedure


Follow these steps to create QR Codes from Data Folder files:

- 1 → **Tools** → → → **Doc./Rec.** → **Barcode/Scan** →



- 2 **Create QR Code** →

- 3 **Data Folder** →



- 4 **Select folder** → → **Select file or entry** →

- QR Code is created.

- 5

- QR Code is saved to Data Folder (Pictures).

From Phone Book Entries

In , **Phone Book** → → **Select entry** → →

From My Details

In , **My Details** → → **Select item** → →

From Entered Text

In , **Text Input** → → **Enter text** → →

Switching Storage Media

In , → **Save to** → → **Phone or Memory Card** → →

Attaching to S! Mail

In , → **Send As** → → **Complete message** →

Incoming Calls


- QR Code creation is not affected by incoming calls. End the call to return.

Scanning Business Cards

Scan business cards and save names, addresses, etc. to Phone Book.

- English business cards may not be scanned correctly.
- Some cards may not be scanned.

- 1** ➔ **Tools** ➔ ➔ **Doc./Rec.** ➔ **Barcode/Scan** ➔



- 2** **Scan Card** ➔


- 3** **Frame card on Display**



Scan Window

- 4** • Press to stop scan.

- 5** ➔ **Scan results appear**



- 6** ➔ • New Phone Book entry is saved.

Key Assignments in Scan Window

- : Toggle focus mode
- : Switch to Photo Camera
- : Focus Lock
- : Mobile Light on/off
- : Adjust brightness
- : Open Help

If Text Exceeds Phone Book Entry Item Character Limit

- Confirmation appears. Follow these steps to delete overage:
Yes ➔

Changing Save Location

- After , ➔ **Save to** ➔ ➔ ➔ ➔

Saving Scanned Image as Phone Book Picture

- After , ➔ **Add Image** ➔ ➔ ➔

Starting Over

- After , ➔ **Yes** ➔ ➔ ➔


Advanced

- Saving to Notepad
- Pasting to message text
- Copying text (P.9-44)

Scanning Text


Some text cannot be scanned.

- 1** → **Tools** → →
Doc./Rec. → **Barcode/Scan**
 →



- 2** **Scan Text** →

- 3** **Frame text in center of Display**

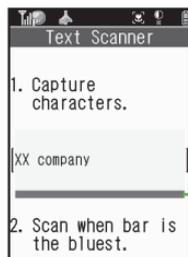

Focus Adjustment Bar

Scan Window


- Adjust to frame text in [].
- Use Focus Adjustment Bar as a guide (better focus in darker blue).

- 4**

- Press to stop scan.

- 5** **Select line** → → **Scan results appear**

- 6**



Key Assignments in Scan Window

: Toggle focus mode

: Switch to Photo Camera

: Focus Lock

: Mobile Light on/off

: Adjust brightness

: Open Help

Correcting Text Type

After , → **Change Mode** → →

Select type → →

Editing Scanned Text

After , → **Select/Edit** → →

Select character → **Select alternative from list or edit directly**
 →

Starting Over

In , → **Yes** → → **From**

Advanced

- Scanning during text entry
- Scanning more text
- Saving scan results
- Saving linked info to Phone Book
- Saving to Notepad
- Opening saved scan results
- Using linked info
- Pasting to message text
- Copying text (P.9-45 - 9-46)

Calendar	
View Settings	
Changing default view	<p>■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ <i>Calendar Settings</i> ➔ ■ ➔ <i>Default View</i> ➔ ■ ➔ Select type ➔ ■</p>
Jumping to specified date	<p>■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ [-8.] ➔ Enter date ➔ ■</p>
Changing date color	<p>[Start Here] ■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ See below</p> <p>By Days of the Week</p> <p>☰ ➔ <i>Calendar Settings</i> ➔ ■ ➔ <i>Set Color</i> ➔ ■ ➔ <i>By Week</i> ➔ ■ ➔ Select day ➔ ■ ➔ Select color ➔ ■</p> <p>By Date</p> <p>Select date ➔ [-4.] ➔ Select color ➔ ■</p> <p>• Not available in 6Month View.</p>
	<p>Resetting "By Date" Colors</p> <p>☰ ➔ <i>Calendar Settings</i> ➔ ■ ➔ <i>Set Color</i> ➔ ■ ➔ <i>Reset Color</i> ➔ ■ ➔ Select option ➔ ■ ➔ <i>Yes</i> ➔ ■</p>
Selecting task view option	<p>■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ ☰ ➔ <i>Calendar Settings</i> ➔ ■ ➔ <i>Tasks View</i> ➔ ■ ➔ Select option ➔ ■</p>
Adding stamps (Month View)	<p>■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ Select date ➔ [-2.] ➔ Select stamp ➔ ■</p> <p>• Not available in 6Month/Week View.</p>
Hiding schedules	<p>■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ Select date ➔ ■ ➔ Select entry ➔ ■ ➔ ■ ➔ <i>Secret:</i> ➔ ■ ➔ <i>On</i> ➔ ■ ➔ <input type="checkbox"/></p>

Saving additional holidays	<p>[Start Here] ■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ ☰ ➔ <i>Calendar Settings</i> ➔ ■ ➔ <i>Set Holiday</i> ➔ ■ ➔ <input type="checkbox"/> <i>Private</i> ➔ See below</p>
	<p>Adding Holidays</p> <p><Empty> ➔ ■ ➔ Enter name ➔ ■ ➔ Enter date ➔ ■ ➔ Select frequency ➔ ■ ➔ <input type="checkbox"/></p>
	<p>Editing Added Holidays</p> <p>Select holiday ➔ ☰ ➔ <i>Edit</i> ➔ ■ ➔ <i>Name:</i> ➔ ■ ➔ Enter name ➔ ■ ➔ <i>Date:</i> ➔ ■ ➔ Enter date ➔ ■ ➔ Select frequency ➔ ■ ➔ <input type="checkbox"/></p>
Removing/restoring preset holidays	<p>■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ ☰ ➔ <i>Calendar Settings</i> ➔ ■ ➔ <i>Set Holiday</i> ➔ ■ ➔ <input type="checkbox"/> <i>Private or Public</i> ➔ Select holiday ➔ ■ (<input type="checkbox"/>/✓)</p>
Saving/Editing Schedules	
Setting Category/Location	<p>[Start Here] ■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ Select date ➔ ■ ➔ Select entry ➔ ■ ➔ ■ ➔ See below</p>
	<p>Category</p> <p><i>Category:</i> ➔ ■ ➔ Select Category ➔ ■ ➔ <input type="checkbox"/></p>
	<p>Location</p> <p><i>Location:</i> ➔ ■ ➔ Enter location ➔ ■ ➔ <input type="checkbox"/></p>
Saving repetitive schedules	<p>■ ➔ <i>Tools</i> ➔ ■ ➔ In PIM/Life menu, <i>Calendar</i> ➔ ■ ➔ Select date ➔ ■ ➔ Select entry ➔ ■ ➔ <i>Repeat:</i> ➔ ■ ➔ Select frequency ➔ ■ ➔ Enter repeat time ➔ ■ ➔ <input type="checkbox"/></p> <p>• Repeat time is not available for <i>Every Year</i>.</p>

Saving S! Friend's Status information

[Start Here] → [Tools] → [In PIM/Life menu, Calendar] → [Select date] → [Select entry] → [S! Friend's Status:] → [Link Setting:] → [Linked] → See below

Availability

Answer Status: → [Edit] → [Y] → [Y] → [Y]

- Set Category first.

Comment

Comment: → [Enter text] → [Y] → [Y]

- Set Category first.

Editing entries

[Tools] → [In PIM/Life menu, Calendar] → [Select date] → [Select entry] → [Select item] → [Edit in the same manner as saving schedules] → [Y]

Changing Alarm tone/video & duration

[Start Here] → [Tools] → [In PIM/Life menu, Calendar] → [Select date] → [Select entry] → [Alarm:] → See below

Alarm Tone/Video

Assign Tone/Video: → [Select folder] →

[Select tone/file] → [Y] → [Y]

- Select start point if required.

Duration

Duration: → [Select time] → [Y] → [Y]

Changing Alarm volume

[Tools] → [In PIM/Life menu, Calendar] → [Alarm Settings] → [Alarm Volume:] → [Adjust level] → [Y]

Selecting Vibration option

[Tools] → [In PIM/Life menu, Calendar] → [Alarm Settings] → [Vibration:] → [Select option] → [Y]

Sounding Alarm tone even in Manner mode

[Tools] → [In PIM/Life menu, Calendar] → [Alarm Settings] → [For Manner Mode:] → [Ring] → [Yes] → [Y]

■ Managing Schedules

Searching entries

[Start Here] → [Tools] → [In PIM/Life menu, Calendar] → See below

By Subject

[6] → [Enter text] → [Y]

By Category

[9] → [Select Category] → [Y]

Checking memory status

[Tools] → [In PIM/Life menu, Calendar] → [Select date] → [Memory Status] → [Y]

Deleting all entries

[Tools] → [In PIM/Life menu, Calendar] → [Delete] → [All Appointments] → [Enter Handset Code] → [Yes] → [Y]

Deleting entries by specifying week (Week View)

[Start Here] → [Tools] → [In PIM/Life menu, Calendar] → See below

Within One Week

[Select date] → [Delete] → [All This Week] → [Yes] → [Y]

Up to the End of Previous Week

[Select date] → [Delete] → [Up to Last Week] → [Yes] → [Y]

■ Managing Tasks

Searching tasks	[Start Here] → [] → <i>Tools</i> → [] → In PIM/Life menu, <i>Tasks</i> → [] → [] → <i>Find</i> → [] → See below
	By Subject <i>By Subject</i> → [] → Enter text → []
	By Due Date <i>By Due Date</i> → [] → Enter date → []
Sorting tasks by priority	[] → <i>Tools</i> → [] → In PIM/Life menu, <i>Tasks</i> → [] → [] → <i>Sort</i> → [] → <i>Priority</i> → []
Checking memory status	[] → <i>Tools</i> → [] → In PIM/Life menu, <i>Tasks</i> → [] → [] → <i>Memory Status</i> → []
Deleting all tasks	[] → <i>Tools</i> → [] → In PIM/Life menu, <i>Tasks</i> → [] → [] → <i>Delete</i> → [] → <i>All Tasks</i> → [] → Enter Handset Code → [] → <i>Yes</i> → []

Alarms

Editing entries	[] → <i>Tools</i> → [] → In PIM/Life menu, <i>Alarms</i> → [] → Select entry → [] → Select item → [] → Edit in the same manner as saving entries → [] → []
Saving entry name	[] → <i>Tools</i> → [] → In PIM/Life menu, <i>Alarms</i> → [] → Select entry → [] → <i>Subject:</i> → [] → Enter name → [] → []
Changing Alarm tone/video	[Start Here] → [] → <i>Tools</i> → [] → In PIM/Life menu, <i>Alarms</i> → [] → Select entry → [] → <i>Assign Tone/Video:</i> → [] → See below Using Preset Tone or Data Folder File Select folder → [] → Select tone/file → [] → [] • Select start point if required. Using Customized Screen Tone/Video <i>Customized Screen</i> → [] → []
Setting handset to vibrate at Alarm Time	[] → <i>Tools</i> → [] → In PIM/Life menu, <i>Alarms</i> → [] → Select entry → [] → <i>Vibration:</i> → [] → <i>On or Link to Sound</i> → [] → [] • Select <i>Link to Sound</i> to allow compatible SMAF files to control vibration.
Sounding Alarm tone even in Manner mode	[] → <i>Tools</i> → [] → In PIM/Life menu, <i>Alarms</i> → [] → <i>Settings</i> → [] → <i>For Manner Mode</i> → [] → <i>Ring</i> → [] → <i>Yes</i> → []
Activating Alarm based on World Clock time	[] → <i>Tools</i> → [] → In PIM/Life menu, <i>Alarms</i> → [] → <i>Settings</i> → [] → <i>Link to World Clk</i> → [] → <i>On</i> → []

Wakeup TV	
Editing entries	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → In PIM/Life menu, <i>Wakeup TV</i> → ▣ → Select entry → ▣ → Select item → ▣ → Edit in the same manner as saving entries → ▣ →
Changing Alarm tone/video	<p> → <i>Tools</i> → ▣ → In PIM/Life menu, <i>Wakeup TV</i> → ▣ → Select entry → ▣ → <i>Assign Tone/Video:</i> → ▣ → See below</p> <p>Using Preset Tone or Data Folder File Select folder → ▣ → Select tone/file → ▣ → </p> <ul style="list-style-type: none"> • Select start point if required. <p>Using Customized Screen Tone/Video <i>Customized Screen</i> → ▣ → </p>
Sounding Alarm tone even in Manner mode	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → In PIM/Life menu, <i>Wakeup TV</i> → ▣ → <i>For Manner Mode</i> → ▣ → <i>Ring</i> → ▣ → <i>Yes</i> → ▣

Calculator	
Copying calculation results	While result appears, → <i>Copy</i> → ▣
Changing exchange rate for currency conversion	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → In PIM/Life menu, <i>Calculator</i> → ▣ → → <i>Money Converter</i> → ▣ → <i>Exchange Rate</i> → ▣ → <i>Domestic or Foreign</i> → ▣ → Enter rate → ▣
Converting currencies	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → In PIM/Life menu, <i>Calculator</i> → ▣ → Enter amount of money → → <i>Money Converter</i> → ▣ → <i>To Domestic or To Foreign</i> → ▣ • Set Exchange Rate first.
Expenses Memo	
Changing Category of saved entry	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → In PIM/Life menu, <i>Expenses Memo</i> → ▣ → <i>Totals</i> → ▣ → Select entry → ▣ → Select Category → ▣
Changing amount	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → In PIM/Life menu, <i>Expenses Memo</i> → ▣ → <i>Totals</i> → ▣ → Select entry → → <i>Change Amount</i> → ▣ → Edit → ▣
Renaming Categories	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → In PIM/Life menu, <i>Expenses Memo</i> → ▣ → <i>Edit Category</i> → ▣ → Select Category → ▣ → Enter name → ▣

Osaifu-Keitai®

Enabling to view e-money balances	<p>▣ → Tools → ▣ → In PIM/Life menu, Osaifu-Keitai → ▣ → IC Card Settings → ▣ → Balance Info → ▣ → Enter Handset Code → ▣ → <Empty> → ▣ → SI Appli or Lifestyle-Appli → ▣ → Select application → ▣</p> <ul style="list-style-type: none"> • For use with compatible Lifestyle-Applications. • Start Lifestyle-Appli once before adding it to Balance Info list.
Checking e-money balance on External Display	<p>In closed position, ☐ (Long) → Balance appears → ☐ → Balance disappears</p> <ul style="list-style-type: none"> • Use ☐ to view balances of listed entries. • Save Lifestyle-Appli to Balance Info list beforehand. • Balances do not appear if IC Card Lock is active.
Moving applications up/down Balance Info list	<p>▣ → Tools → ▣ → In PIM/Life menu, Osaifu-Keitai → ▣ → IC Card Settings → ▣ → Balance Info → ▣ → Enter Handset Code → ▣ → Select application → ☐ → Move → ▣ → Select location → ▣</p>
Removing applications from Balance Info list	<p>▣ → Tools → ▣ → In PIM/Life menu, Osaifu-Keitai → ▣ → IC Card Settings → ▣ → Balance Info → ▣ → Enter Handset Code → ▣ → Select application → ☐ → Delete → ▣</p>
Customizing handset response to reader/writer commands	<p>▣ → Tools → ▣ → In PIM/Life menu, Osaifu-Keitai → ▣ → IC Card Settings → ▣ → Interface Settings → ▣ → Enter Handset Code → ▣ → Select item → ▣ → Off → ▣</p>
Opening IC Card properties	<p>▣ → Tools → ▣ → In PIM/Life menu, Osaifu-Keitai → ▣ → IC Card Settings → ▣ → IC Card Status → ▣</p>

Changing IC Card Lock notice recipient

Start Here ▣ → **Tools** → ▣ → In PIM/Life menu, **Osaifu-Keitai** → ▣ → **IC Card Settings** → ▣ → **Remote Lock** → ▣ → Enter Handset Code → ▣ → **Mail Remote Lock** → ▣ → **Notice Settings** → ▣ → **Send Notice** → ▣ → See below

Changing Recipient

To Set Recipient → ▣ → **Set Recipient** → ▣ → **Select method** → ▣ → **Select/enter number/address** → ▣ → **☐** → **☐**

- Omit step of pressing **☐** when selecting **Phone Book** as setting method.

Disabling Notice

Off → ▣ → **☐** → **☐**

Changing required Missed Call count for Call Remote Lock

▣ → **Tools** → ▣ → In PIM/Life menu, **Osaifu-Keitai** → ▣ → **IC Card Settings** → ▣ → **Remote Lock** → ▣ → Enter Handset Code → ▣ → **Call Remote Lock** → ▣ → **Count for Lock** → ▣ → Enter Missed Call count → ▣ → **☐**

Restoring default Osaifu-Keitai® settings

▣ → **Tools** → ▣ → In PIM/Life menu, **Osaifu-Keitai** → ▣ → **IC Card Settings** → ▣ → **Set to Default** → ▣ → Enter Handset Code → ▣ → **Yes** → ▣

Simulated Call

Starting via Simulated Call menu	<p>▣ → Tools → ▣ → In PIM/Life menu, Simulated Call → ▣ → Receive Simulated Call → ▣ → Yes → ▣</p> <ul style="list-style-type: none"> • Simulated Call starts immediately regardless of Receive Timing setting. • Settings remain even after starting Simulated Call during setup.
Clearing caller information	<p>▣ → Tools → ▣ → In PIM/Life menu, Simulated Call → ▣ → Set Caller → ▣ → Yes → ▣ → Y → Y</p>
Overriding Silent volume setting	<p>▣ → Tools → ▣ → In PIM/Life menu, Simulated Call → ▣ → For Silent Mode → ▣ → Ring → ▣ → Yes → ▣ → Y</p>

Hour Minder

Changing Hour Minder tone/video	<p>Start Here ▣ → Tools → ▣ → Clock/Gauge → Hour Minder → ▣ → Advanced → ▣ → Assign Tone/Video: → ▣ → See below</p> <p>Using Preset Tone or Data Folder File Select folder → ▣ → Select tone/file → ▣ → Y → Y</p> <ul style="list-style-type: none"> • Select start point if required.
	<p>Using Customized Screen Tone/Video Customized Screen → ▣ → Y → Y</p>
Setting handset to vibrate at Hour Minder Time	<p>▣ → Tools → ▣ → Clock/Gauge → Hour Minder → ▣ → Advanced → ▣ → Vibration: → ▣ → On or Link to Sound → ▣ → Y → Y</p> <ul style="list-style-type: none"> • Select Link to Sound to allow compatible SMAF files to control vibration.
Sounding Hour Minder tone even in Manner mode	<p>▣ → Tools → ▣ → Clock/Gauge → Hour Minder → ▣ → Advanced → ▣ → For Manner Mode: → ▣ → Ring → ▣ → Yes → ▣ → Y → Y</p>
Activating Hour Minder based on World Clock time	<p>▣ → Tools → ▣ → Clock/Gauge → Hour Minder → ▣ → Advanced → ▣ → Link to World Clk: → ▣ → On → ▣ → Y → Y</p>

Pedometer

Changing Pedometer indicator	<ul style="list-style-type: none"> ▣ → <i>Settings</i> → ▣ → In Phone menu, <i>Display</i> → ▣ → <i>Standby Display</i> → ▣ → <i>Pedometer</i> → ▣ → <i>Select item</i> → ▣
Using Pedometer Calendar	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → <i>Clock/Gauge</i> → <i>Pedometer</i> → ▣ → <i>Pedometer Calendar</i> → ▣ → <i>Select date</i> → ▣ • Degree of achievement appears. • Press <i>[*]</i> or <i>[#]</i> to view previous or next month.
Checking accumulated data	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → <i>Clock/Gauge</i> → <i>Pedometer</i> → ▣ → <i>Accumulated Data</i> → ▣ • Change in body information is reflected in the data.
Resetting accumulated data	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → <i>Clock/Gauge</i> → <i>Pedometer</i> → ▣ → <i>Accumulated Data</i> → ▣ → <i>Reset Walk Data</i> → ▣ → <i>Enter Handset Code</i> → ▣ → <i>Yes</i> → ▣ • Averages are also reset.
Customizing achievement notice	<ul style="list-style-type: none"> <i>Start Here</i> ▣ → <i>Tools</i> → ▣ → <i>Clock/Gauge</i> → <i>Pedometer</i> → ▣ → <i>Settings</i> → ▣ → <i>Target</i> → ▣ → <i>Goal Announcement</i> → ▣ → <i>On</i> → ▣ → See below Changing Tone <i>Goal Sound</i> → ▣ → <i>Select pattern</i> → ▣ Changing Tone Volume <i>Goal Volume</i> → ▣ → <i>Adjust level</i> → ▣ Changing Vibration Pattern <i>Vibration</i> → ▣ → <i>Select pattern</i> → ▣ Changing Duration <i>Duration</i> → ▣ → <i>Select time</i> → ▣ • For custom Duration, select <i>Other</i> and press ▣.

S! GPS Navi

Sending current location via mail	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → <i>Clock/Gauge</i> → <i>S! GPS Navi</i> → ▣ → <i>Location Mail</i> → ▣ → <i>Positioning complete</i> → ▣ → <i>Complete message</i> → <i>[v]</i> • When accuracy level is 1 or 2, choose <i>No</i> and press ▣ after positioning, then complete message.
Changing map source URL	<ul style="list-style-type: none"> <i>Start Here</i> ▣ → <i>Tools</i> → ▣ → <i>Clock/Gauge</i> → <i>S! GPS Navi</i> → ▣ → <i>NAVI Settings</i> → ▣ → <i>Map URL Settings</i> → ▣ → See below Adding URLs <<i>Not set</i>> → ▣ → <i>Enter URL</i> → ▣ Setting Destination URL <i>Select URL</i> → ▣ Viewing/Editing/Deleting URLs <i>Select URL</i> → <i>[v]</i> → <i>Display, Edit or Delete</i> → ▣ • Follow onscreen instructions.
Disabling positioning	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → <i>Clock/Gauge</i> → <i>S! GPS Navi</i> → ▣ → <i>NAVI Settings</i> → ▣ → <i>Positioning Lock</i> → ▣ → <i>On</i> → ▣ → <i>Enter Handset Code</i> → ▣
Selecting Location Information transmission option	<ul style="list-style-type: none"> ▣ → <i>Tools</i> → ▣ → <i>Clock/Gauge</i> → <i>S! GPS Navi</i> → ▣ → <i>NAVI Settings</i> → ▣ → <i>Send Location Info</i> → ▣ → <i>Select option</i> → ▣ → <i>Enter Handset Code</i> → ▣

Using My Location & Location Log	<p>[Start Here] → Tools → Clock/Gauge → S! GPS Navi → My Location List or Location Logs → Select entry or record → See below</p> <p>Opening Map Yes</p> <p>Showing Routes via Navi Appli Go to → Yes</p> <ul style="list-style-type: none"> Follow onscreen instructions. <p>Inserting into Message Text As Msg. Text → Complete message</p> <p>Saving to Phone Book Save to Ph.Book → As New Entry → Complete other fields</p> <ul style="list-style-type: none"> To add to an existing entry, select <i>As New Detail</i>.
	<p>Saving Location Log records to My Location</p> <p>Tools → Clock/Gauge → S! GPS Navi → Location Logs → Select record → Set as My Location → Name → Enter name</p>
	<p>Deleting Location Log records</p> <p>Tools → Clock/Gauge → S! GPS Navi → Location Logs → Select record → Delete or Delete All → Yes</p> <ul style="list-style-type: none"> Omit record selection step when deleting all records.

Notepad

Editing Notepad	<p>[Start Here] → Tools → Doc./Rec. → Notepad → Select entry → See below</p> <p>Editing Text Edit Text → Edit</p> <p>Changing Category Change Category → Select Category</p>
	<p>Searching text within all entries</p> <p>Tools → Doc./Rec. → Notepad → Select entry → Search → Enter text</p>
	<p>Inserting Notepad text into message text</p> <p>Tools → Doc./Rec. → Notepad → Select entry → Send → As Message Text → S! Mail or SMS → Complete message</p> <ul style="list-style-type: none"> S! Mail Composition window opens automatically depending on character count.
<p>Sending entries via S! Mail</p> <p>Tools → Doc./Rec. → Notepad → Select entry → Send → Via Message → Complete message</p>	
<p>Creating text files</p> <p>Tools → Doc./Rec. → Notepad → Select entry → Setting/Manage → Create Text File → Enter name → Save here</p>	
<p>Importing text files</p> <p>Tools → Doc./Rec. → Notepad → Select entry → Setting/Manage → Import Text File → Select file</p>	
<p>Checking memory status</p> <p>Tools → Doc./Rec. → Notepad → Select entry → Setting/Manage → Memory Status</p>	

Opening properties

Voice Recorder

Saving longer recordings

- Insert Memory Card to record in *Extended Voice* mode. (Recording is saved automatically.)

Sending Voice files via S! Mail

- Available in *For Message* mode.

Switching storage media

- Available in *For Message* mode.
- Set to *Ask Each Time* to select media after every recording.

Scan Barcode

[Start Here] In a text entry window, in center of Display

Scanning during text entry

Pasting All Scan Results

Pasting a Part of Scan Results

Scanning continuously

in center of Display

- Choose *Yes* to continue scanning or *No* and press to view scan results.

Reading saved barcode images

Saving scan results

in center of Display

Saving to Notepad

in center of Display

Saving linked info to Phone Book	<p> → Tools → → Doc./Rec. → Barcode/Scan → → Scan Barcode → → Frame barcode in center of Display → → Select number or mail address → → Save to Ph.Book → → As New Entry → → Complete other fields </p> <ul style="list-style-type: none"> • To add to an existing entry, select As New Detail. • When MEMORY: appears in scan results, press to enter the items underlined with a dotted line automatically in Phone Book entry window.
Opening saved scan results	<p> → Tools → → Doc./Rec. → Barcode/Scan → → Scanned Results → → Select file </p> <ul style="list-style-type: none"> • Select a file and press to rename files, open properties or delete files. • Some files may not open.
Using linked info	<p> → Start Here → → Tools → → Doc./Rec. → Barcode/Scan → → Scan Barcode → → Frame barcode in center of Display → → See below </p>
	<p> Dialing Numbers Select phone number → → </p>
	<p> Sending Messages Select mail address → → Complete message → </p> <ul style="list-style-type: none"> • When MAILTO: appears in scan results, press to enter the items underlined with a dotted line automatically in Composition window.
<p> Accessing Internet Sites Select URL → </p>	

Using images as Wallpaper	<p> → Tools → → Doc./Rec. → Barcode/Scan → → Scan Barcode → → Frame barcode in center of Display → → Select image → → Set as Wallpaper → → Vertical or Horizontal </p> <ul style="list-style-type: none"> • For images smaller or larger than Display, Wallpaper Display options appear; follow onscreen prompts.
Saving images & melodies	<p> → Tools → → Doc./Rec. → Barcode/Scan → → Scan Barcode → → Frame barcode in center of Display → → Select file → → To Data Folder </p>
Opening or playing files	<p> → Tools → → Doc./Rec. → Barcode/Scan → → Scan Barcode → → Frame barcode in center of Display → → Select file </p>
Using images for System Graphics	<p> → Tools → → Doc./Rec. → Barcode/Scan → → Scan Barcode → → Frame barcode in center of Display → → Select image → → As System → → Select item → → Specify display area </p> <ul style="list-style-type: none"> • Some images may be usable without specifying display area.

Pasting to message text	<p>Start Here → Tools → Doc./Rec. → Barcode/Scan → Scan Barcode → Frame barcode in center of Display → Send Message → See below</p> <p>All Text</p> <p>→ S! Mail or SMS → Complete message</p> <ul style="list-style-type: none"> S! Mail Composition window opens automatically depending on character count.
	<p>Selected Text</p> <p>→ Select first character → Highlight text range → S! Mail or SMS → Complete message</p> <ul style="list-style-type: none"> S! Mail Composition window opens automatically depending on character count.
Copying text	<p>Start Here → Tools → Doc./Rec. → Barcode/Scan → Scan Barcode → Frame barcode in center of Display → See below</p> <p>Text</p> <p>→ Copy → Select first character → Highlight text range</p> <p>Number, Address or URL</p> <p>Select number, mail address or URL → Copy Telephone, Copy Address or Copy URL</p>

Scan Card

Saving to Notepad	<p>→ Tools → Doc./Rec. → Barcode/Scan → Scan Card → Frame card in center of Display → Notepad</p>
Pasting to message text	<p>Start Here → Tools → Doc./Rec. → Barcode/Scan → Scan Card → Frame card in center of Display → Send Message → See below</p> <p>All Text</p> <p>→ S! Mail or SMS → Complete message</p> <ul style="list-style-type: none"> S! Mail Composition window opens automatically depending on character count.
	<p>Selected Text</p> <p>→ Select first character → Highlight text range → S! Mail or SMS → Complete message</p> <ul style="list-style-type: none"> S! Mail Composition window opens automatically depending on character count.
Copying text	<p>Start Here → Tools → Doc./Rec. → Barcode/Scan → Scan Card → Frame card in center of Display → See below</p> <p>Text</p> <p>→ Copy → Select first character → Highlight text range</p>

Scan Text	
Scanning during text entry	In a text entry window,
Scanning more text	<ul style="list-style-type: none"> • Select <i>Continue Part</i> to enter additional text or <i>Scan More</i> to enter text after a line break.
Saving scan results	
Saving linked info to Phone Book	<ul style="list-style-type: none"> • To add to an existing entry, select <i>As New Detail</i>.
Saving to Notepad	
Opening saved scan results	<ul style="list-style-type: none"> • Select a file and press to rename files, open properties or delete files. • Some files may not open.

Using linked info	
	<p>Dialing Numbers</p>
Pasting to message text	<p>Sending Messages</p>
	<p>Accessing Internet Sites</p>
Pasting to message text	
	<p>All Text</p> <ul style="list-style-type: none"> • S! Mail Composition window opens automatically depending on character count.
	<p>Selected Text</p> <ul style="list-style-type: none"> • S! Mail Composition window opens automatically depending on character count.

Copying text

Start Here   Tools   Doc./Rec. 
Barcode/Scan   Scan Text  
Frame text in center of Display   Select
line    See below

Text

  Copy   Select first character  
 Highlight text range  

Number, Address or URL

Select number, mail address or URL  
Copy Telephone, Copy Address or Copy URL
  

Osaifu-Keitai®

? Cannot use Osaifu-Keitai® (S! FeliCa)

- Battery may be low. Charge battery or install a charged battery.

? Recognition via reader/writer takes time

- Check  logo area. Foreign articles can block/hamper recognition.

? Call Remote Lock does not activate even after specified number of Missed Calls

- Missed Call count is reset by calls from other numbers. If series is interrupted, start over from the beginning.
- When Call Forwarding is active, Missed Calls may not be recorded.

Wakeup TV

? TV does not activate with specified channel

- If Wakeup TV Time arrives while TV is active, channel does not switch to the specified one.

Voice Recorder

? Cannot record properly

- If incompatible microphone is connected, recording may fail.

? Noise/skipping occurs

- Avoid shocks to handset while recording; may cause noise or skipping.

? Recording takes time to start

- Recording window may take longer to open as more Voice files are saved on Memory Card.

Scanning Barcode/Card/Text

? Cannot read barcodes properly

- Scan may fail if barcode is dirty or unclear.
- Scan may fail if barcode is scanned under inadequate light.
- Scan may fail if multiple barcodes are captured at one time.

? Cannot read barcodes during text entry

- Scanning is not available during calls or when mobile camera is active.

? Cannot read barcode images in Data Folder automatically

- When scan fails, follow onscreen instructions and select next barcode image manually.

? Cannot scan business cards properly

- Scan fails if business card is printed in light-colored text on a dark background, handwritten or printed in casual/decorative fonts, decorated with a background pattern, or designed with both vertical and horizontal text.
- Scan may fail if business card is printed in light-colored text on a light background, printed in italics or extremely small fonts, decorated with a logo or logo-like text, printed on a glossy paper or other material, or dirty/folded.

? Cannot scan text properly

- Scanning over 35 characters at one time may yield poor results.
- Adjust to frame text in []. Letters at the ends may be distorted.