

<b>Infrared</b> .....	<b>13-2</b>
Transferring Files via Infrared .....	13-3
<b>IC Transmission</b> .....	<b>13-5</b>
Transferring Files via IC Transmission .....	13-6
<b>Mass Storage</b> .....	<b>13-7</b>
Connecting to PC .....	13-7

<b>Backup</b> .....	<b>13-8</b>
Basics .....	13-8
Backup & Restore .....	13-9
<b>S! Addressbook Back-up (SAB)</b> ...	<b>13-10</b>
About SAB.....	13-10
Backup & Restore .....	13-12
<b>Additional Functions</b> .....	<b>13-13</b>
<b>Troubleshooting</b> .....	<b>13-15</b>

# 13

## Connectivity & File Backup



## Infrared

Wirelessly transfer files between 831SH s and compatible devices.

### Transferable Files


Phone Book	Received Msg.
Calendar	Sent Messages
Tasks	Drafts
Notepad	Templates
Bookmarks	Data Folder

- Copy/forward protected files are not transferable.
- Some files may not be transferable; some settings may be lost, or files may not be saved properly. For details, see "Troubleshooting" at the end of this chapter.

### Getting Started

#### Infrared Precautions

Align Infrared Ports of both devices.



- Do not place objects between devices.
- Keep Infrared Ports aligned during transfer.
- Do not look into Infrared Port during infrared transmissions. Eyesight may be affected.

### Transfer Options

<b>One File Transfer</b>	Transfer single files
<b>All File Transfer</b>	Transfer all files by function

- Some transfer options may be unavailable depending on file type.
- Transfer Memory Card files one by one.

#### Authorization Code

- Four-digit code required for infrared transfers. All File Transfers possible when codes match. (Authorization Code is changeable for each transfer.)




# Transferring Files via Infrared

## Receiving Files


### 1 (Long)



 appears

- Infrared is activated. (Alternatively, activate it via Main Menu.)
- Handset receives files if sent within three minutes.
- Handset must be in Standby to accept connection requests.
- To cancel infrared, Long Press .

### 2 Connection request arrives



Request Window


### 3 Perform subsequent operations

- To cancel transfer, press .

## Subsequent Operations

### ■ One File Transfer

Yes    Yes  

- If save location confirmation appears, select a location and press .

### ■ All File Transfer (Adding Files)

Yes    Enter Handset Code 

  Enter Authorization Code 

  As New Items  

### ■ All File Transfer (Overwriting Existing Files)

Yes    Enter Handset Code 

  Enter Authorization Code 

  DeleteAll&Save    Yes

- For Phone Book, My Details except handset phone number is overwritten as well.

## Advanced

-   Activating Infrared via Main Menu (P.13-13)




## Sending Files


## One File Transfer

Example: Phone Book entry

- 1 → **Select entry** → → **Send Entry** →




- 2 **Via Infrared** →



- 3 **Yes** → → **Transfer starts**
- When finished, entry search window returns.

## All File Transfer

- 1 → **Settings** → → → **Connectivity** → **Infrared** →
- 2 **Send All** →
- 3 **Yes** → → **Enter Handset Code** →



- 4 **Select item** → (  /  ) → **Complete selection** →
- 5 **Enter Authorization Code** → → **Transfer starts** →

## Sending Phone Book

- In , follow these steps to select whether to send Phone Book Pictures:  
**Yes or No** →

## Advanced

- Sending My Details ● Sending non-Phone Book files (P.13-13)



## IC Transmission


Wirelessly transfer files between 831SH s and compatible devices.

- For transferable files, see P.13-2.
- Cancel IC Card Lock beforehand.
- Disconnect Headphones, USB Cable and AC Charger beforehand.

### Getting Started

#### IC Transmission Precautions

Align  logos of both devices.



Align  logos

Keep  logos aligned during transfer.

### Transfer Options


<b>One File Transfer</b>	Transfer single files
<b>All File Transfer</b>	Transfer all files by function

- Some transfer options may be unavailable depending on file type.
- Transfer Memory Card files one by one.

#### Authorization Code

- Four-digit code required for IC transfers. All File Transfers possible when codes match. (Authorization Code is changeable for each transfer.)

### Advanced


-   Disabling one file reception (P.13-13)



## Transferring Files via IC Transmission

### Receiving Files

#### 1 Connection request arrives



Request Window

- Handset must be in Standby to accept connection requests.


#### 2 Perform subsequent operations

- To cancel transfer, press .

### Subsequent Operations

#### One File Transfer

Yes  $\rightarrow$    $\rightarrow$  Yes  $\rightarrow$  

- If save location confirmation appears, select a location and press .

#### All File Transfer (Adding Files)

Yes  $\rightarrow$    $\rightarrow$  Enter Handset Code  $\rightarrow$

  $\rightarrow$  Enter Authorization Code  $\rightarrow$

  $\rightarrow$  As New Items  $\rightarrow$  

#### All File Transfer (Overwriting Existing Files)

Yes  $\rightarrow$    $\rightarrow$  Enter Handset Code  $\rightarrow$  

$\rightarrow$  Enter Authorization Code  $\rightarrow$    $\rightarrow$

DeleteAll&Save  $\rightarrow$    $\rightarrow$  Yes  $\rightarrow$  


- For Phone Book, My Details except handset phone number is overwritten as well.

### Sending Files


#### One File Transfer

Example: Phone Book entry

#### 1 $\rightarrow$ Select entry $\rightarrow$ $\rightarrow$ Send Entry $\rightarrow$



#### 2 Via IC Transmission $\rightarrow$




#### 3 Yes $\rightarrow$ $\rightarrow$ Transfer starts

#### All File Transfer

#### 1 $\rightarrow$ Settings $\rightarrow$ $\rightarrow$ Connectivity $\rightarrow$ IC Transmission $\rightarrow$

#### 2 Send All $\rightarrow$



#### 3 Yes $\rightarrow$ $\rightarrow$ Enter Handset Code $\rightarrow$





#### 4 Select item $\rightarrow$ (/ ) $\rightarrow$ Complete selection $\rightarrow$

#### 5 Enter Authorization Code $\rightarrow$ $\rightarrow$ Transfer starts $\rightarrow$

#### Sending Phone Book

- In , Picture transfer confirmation appears; follow these steps:  
Yes or No  $\rightarrow$  

### Advanced

-   Sending My Details  Sending non-Phone Book files (P.13-13)

## Connecting to PC


### Accessing Memory Card from PC

Connect handset to a PC via USB Cable to access Memory Card from the PC without removing the card from handset.

- USB Cable may be purchased separately.
- If handset is connected to a PC via USB Cable, disconnect it first.

1  ➔ **Settings** ➔  ➔   
**Connectivity** ➔ **USB Mode**  
 ➔ 

2 **Mass Storage** ➔ 



3 **Yes** ➔ 

4 **Connect handset to a PC via USB Cable**

- Use PC to access Memory Card.

5  ➔ **Yes** ➔  ➔ **Connection ends**

- Safely remove handset (recognized as removable hardware device) on the PC, then disconnect USB Cable.

### Utility Software (Japanese)

For more PC-related operations, download Utility Software (including USB Cable driver) from the following URL.

- **Utility Software**  
<http://k-tai.sharp.co.jp/download/tools/utility/>

### Mobile Data Communication Fees

- Using the Internet by connecting handset to PC/PDA via USB Cable may incur high charges as large-volume packet transmissions tend to occur in a short period of time.



## Basics

Back up information to Memory Card, and restore to handset as needed.

### Supported Items

Select items to back up, or transfer all at once.

Items with \* are selectable at once via **Check Selection** in Options menu.

Phone Book*	Drafts*
Calendar*	Templates
Tasks*	Contents Keys
Bookmarks*	Data Folder
Notepad*	Mail Groups
Received Msg.*	User Dictionary
Sent Messages*	

### Precautions

- Not available if battery is low.
- Some items may not be transferable; some settings may be lost, or files may not transfer properly. For details, see "Troubleshooting" at the end of this chapter.

### Transferring All Items

- Use blank Memory Card for **Backup All Items**. Do not use the card to save other files after **Backup All Items**; backed up content may not be restored properly.

### Contents Keys

- Moving Keys to Memory Card creates a special file. Performing Backup again on the same Memory Card overwrites that file. Perform Restore beforehand.






# Backup & Restore

## Handset to Memory Card

Follow these steps to back up selected items at once:

- 1 → **Settings** → → → **Connectivity** → **Backup/Restore** →



Backup/Restore Menu

- 2 **Backup Selected Items** → → **Enter Handset Code** →
- 3 **Yes** →
- 4 **Select item** → (□/✓) → **Complete selection**
  - For **Phone Book**, confirmation appears. Choose **Yes** or **No** and press .

- 5 → **Yes** →
  - To cancel, press .

- 6 **Backup complete** → →

### Selecting Multiple Items at Once

In 4, → **Select option** → →

From 5

### Selecting/Canceling All Items

In 4, → **Check All or Uncheck All**

→

## Memory Card to Handset

Follow these steps to restore selected items:

Restoring backed up content to handset overwrites current handset content (with the exception of Contents Keys).

- 1 **In Backup/Restore menu, Restore Selected Items** → → **Enter Handset Code** →
- 2 **Yes** →
- 3 **Select item** → (□/✓) → **Complete selection**

- 4
  - If no file list appears, skip ahead to 7.

- 5 **Select file** →
  - Repeat 5 to complete selection.

- 6

- 7 **Yes** →
  - To cancel, press .

- 8 **Restore complete** → →

### Selecting Multiple Items at Once

In 3, → **Select option** → →

From 4

### Selecting/Canceling All Items

In 3, → **Check All or Uncheck All**

→

### Changing Restoration Method

After 3, select item → → **Ch. to Add Mode or Chg. to Overwrite Mode** → → From 4


## Advanced

- Backing up all items ● Encoding data for backup ● Restoring all items ● Deleting backup files (P.13-13)



## About SAB

Back up Phone Book content in SAB; add Phone Book changes to SAB anytime. Edit SAB online via PC; add SAB changes to Phone Book anytime. Restore lost or altered Phone Book content from SAB.

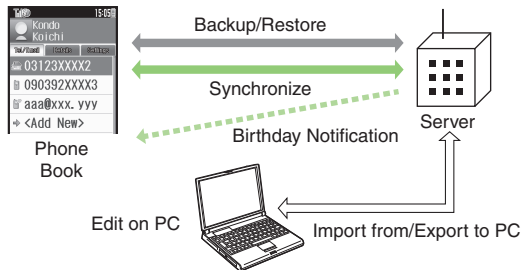

- SAB requires a separate contract and basic monthly fee.
- Use SAB to add Phone Book content to a new compatible SoftBank handset; some conditions apply (P.13-11).
- Use a PC to edit SAB online.
- For more about SAB, see SoftBank Mobile Website (P.15-22).
- Sync commands (Backup, Restore and Synchronize) all incur transmission fees.

## SAB Sync Commands & Features

<b>Backup/Restore</b>	<b>Backup</b>	Export Phone Book content to SAB <sup>1</sup>
	<b>Restore</b>	Import SAB content to Phone Book <sup>2</sup>
<b>Synchronize</b>	<b>Synchronize</b>	Synchronize Phone Book and SAB <sup>3</sup>
	<b>Oneway-Client</b>	Add Phone Book changes to SAB <sup>4</sup>
	<b>Oneway-Sever</b>	Add SAB changes to Phone Book <sup>5</sup>
<b>Edit on PC</b>	<b>Import from PC</b>	Upload PC address book info to SAB
	<b>Export to PC</b>	Export SAB content to PC address book
<b>Send Notice<sup>6</sup></b>	<b>Birthday Notification</b>	SAB sends reminders via SMS to handset
	<b>Email Address Notification<sup>7</sup></b>	Send new handset mail address to specified addresses
	<b>"Disaster Message Board" Message Notification<sup>8</sup></b>	Send emergency message board update to specified addresses
<b>Spam Filter</b>	<b>Tomodachi Email Filter<sup>9</sup></b>	Always accept messages from mail addresses saved in SAB

<sup>1</sup> Any existing SAB content is deleted.

<sup>2</sup> Any existing Phone Book content is deleted.

<sup>3</sup> If the same entry item is edited in Phone Book and SAB, SAB content is referenced.

<sup>4</sup> Unrelated SAB changes remain.

<sup>5</sup> Unrelated Phone Book changes remain.

<sup>6</sup> Access this function via handset or a PC.

<sup>7</sup> Backup resets notification setting; handset address is sent to all addresses.

<sup>8</sup> Backup resets notification setting; updates are not sent to any address.

<sup>9</sup> Export Phone Book content to SAB beforehand.



## Service Usage Outline

### Complete Contract

Visit a SoftBank Shop, dial 157 from a SoftBank handset for SoftBank Mobile Customer Center, General Information or access My SoftBank (Japanese) via Yahoo! Keitai.



### Receive User ID & Password

After subscription, user ID and password arrive via SMS.

- User ID and password are required to use SAB via a PC.



### Use SAB

Export Phone Book content to SAB.

## Precautions

### ■ Unsynchronizable Items

SAB restoration cancels these Phone Book settings:

- Picture, Tone/Video, Vibration

### ■ Unintentional Phone Book or SAB Content Deletion

- When no Phone Book content exists, selecting **Synchronize**, **Oneway-Client** or **Backup** deletes all SAB content.
- When no SAB content exists, selecting **Synchronize**, **Oneway-Sever** or **Restore** deletes all Phone Book content.

### ■ Phone Book ⇄ SAB Content Capacity Disparities

When the number of savable items varies between Phone Book and SAB entries, Synchronization reflects lower limit.

### ■ Contract Termination

SAB content is deleted upon contract termination.

### ■ SAB Transfers to New Handsets

- **SAB-Compatible 3G Handsets**  
SAB remains as last saved and is fully accessible.
- **Other 3G Handsets**  
SAB remains as last saved and is accessible via PC.
- **V3/V4/V5/V6/V8 Series**  
Service contract is terminated and SAB content is deleted.

### ■ When Double Number is Active

Regardless of usage mode setting, all Phone Book content is backed up.




## Backup & Restore

### Backup (Phone Book → SAB)

Any existing SAB content is deleted.

- 1  → **Phone** →  → **S! Addressbook Backup** →



S! Addressbook Menu

- 2 **Start Sync** →  → **Backup** →

- 3 **Yes** →  → **Enter Handset Code** →

- Backup starts; when completed, details appear.

- 4  → **Backup complete**

#### Canceling Backup

- **Yes** →

### Restore (SAB → Phone Book)

Any existing Phone Book content is deleted.

- 1 In S! Addressbook menu, **Start Sync** →  → **Restore** →

- 2 **Yes** →  → **Enter Handset Code** →

- Restore starts; when completed, details appear.

- 3  → **Restore complete**

#### Canceling Restore

- **Yes** →

### Synchronizing Phone Book

Synchronize Options:

<b>Synchronize</b>	Synchronize Phone Book and SAB
<b>Oneway-Client</b>	Add Phone Book changes to SAB
<b>Oneway-Sever</b>	Add SAB changes to Phone Book

If this is your first use of SAB (new handset), Synchronization is performed via Synchronize regardless of selection.

- 1 In S! Addressbook menu, **Start Sync** →  → **Select option** →

- 2 **Yes** →  → **Enter Handset Code** →

- Synchronization starts; when completed, details appear.

- 3  → **Synchronization complete**

#### Canceling Synchronization

- **Yes** →

### Advanced

- Confirming user ID & password  Auto synchronization  Opening log (P.13-14)



Infrared	
Activating Infrared via Main Menu	<ul style="list-style-type: none"> <li>☐ → Settings → ☐ → ☐ Connectivity → Infrared → ☐ → Switch On/Off → ☐ → On(3 min.) → ☐</li> </ul>
Sending My Details	<ul style="list-style-type: none"> <li>☐ → 072 → ☐ → Send My Card → ☐ → Via Infrared → ☐ → Yes → ☐ → Transfer starts</li> </ul>
Sending non-Phone Book files	<ul style="list-style-type: none"> <li>In file list, select file → ☐ → Send (or Send/Blog) → ☐ → Via Infrared → ☐ → Yes → ☐ → Transfer starts</li> </ul>
IC Transmission	
Disabling one file reception	<ul style="list-style-type: none"> <li>☐ → Settings → ☐ → ☐ Connectivity → IC Transmission → ☐ → Recv. Forwarded → ☐ → Off(Disabled) → ☐</li> </ul>
Sending My Details	<ul style="list-style-type: none"> <li>☐ → 072 → ☐ → Send My Card → ☐ → Via IC Transmission → ☐ → Yes → ☐ → Transfer starts</li> </ul>
Sending non-Phone Book files	<ul style="list-style-type: none"> <li>In file list, select file → ☐ → Send (or Send/Blog) → ☐ → Via IC Transmission → ☐ → Yes → ☐ → Transfer starts</li> </ul>

## Backup

## Backup &amp; Restore

Backing up all items	<ul style="list-style-type: none"> <li>☐ → Settings → ☐ → ☐ Connectivity → Backup/Restore → ☐ → Backup All Items → ☐ → Enter Handset Code → ☐ → Yes → ☐ → Yes → ☐ → Backup complete → ☐ → ☐</li> </ul>
Encoding data for backup	<ul style="list-style-type: none"> <li>☐ → Settings → ☐ → ☐ Connectivity → Backup/Restore → ☐ → Settings/Manage → ☐ → Encode Settings → ☐ → Select item → ☐ → On → ☐</li> <li>• Available for Phone Book, Messaging folders, Calendar and Tasks.</li> </ul>
Restoring all items	<ul style="list-style-type: none"> <li>☐ → Settings → ☐ → ☐ Connectivity → Backup/Restore → ☐ → Restore All Items → ☐ → Enter Handset Code → ☐ → Yes → ☐ → Yes → ☐ → Restore complete → ☐ → ☐</li> </ul>
Backup Files	
Deleting backup files	<ul style="list-style-type: none"> <li>☐ → Settings → ☐ → ☐ Connectivity → Backup/Restore → ☐ → Settings/Manage → ☐ → File Management → ☐ → Select item → ☐ → Select file → ☐ (☐/☑) → Complete selection → ☐ → Yes → ☐</li> </ul>



## S! Addressbook Back-up

Confirming user ID & password	<p>☰ → <i>メニューリスト</i> → ● → <i>My SoftBank</i> → ● → <i>English</i> → ● → <i>Password confirmation for S! Address Book</i> → ● → Follow onscreen instructions</p>
Auto synchronization	<p>☰ (Start Here) → ● → <i>Phone</i> → ● → <i>S! Addressbook Backup</i> → ● → <i>Set Auto Sync</i> → ● → Enter Handset Code → ● → See below</p> <p><b>Activating</b>  <i>Set On/Off</i> → ● → <i>On</i> → ●</p> <p><b>Changing Auto Sync Frequency</b>  <i>Set On/Off</i> → ● → <i>On</i> → ● → <i>Set Frequency</i> → ● → <i>Select frequency</i> → ● → Enter/select date/time/day of the week → ●</p> <ul style="list-style-type: none"> <li>● For <i>After Editing Ph.Book(10 min.)</i>, omit steps for date, time, etc.</li> </ul> <p><b>Changing Auto Sync Command</b>  <i>Set On/Off</i> → ● → <i>On</i> → ● → <i>Set Sync Mode</i> → ● → <i>Select command</i> → ●</p>
Opening log	<p>● → <i>Phone</i> → ● → <i>S! Addressbook Backup</i> → ● → <i>Sync History</i> → ● → Select record → ●</p>



## File Transfer

### ? Some files are not received

- If storage limit is reached during transfers, remaining files will not be received.

### ? Cannot receive/accept connection requests even when Infrared is On

- Handset may not be in Standby.
- Keypad Lock/Function Lock may be active.
- Software Update may be in progress.

### ? Phone Book settings are lost

- One file transfer resets these settings:
  - Category, Tone/Video, Vibration, Secret
- Picture setting may be lost depending on image; send the image separately and reassign it.

### ? Calendar/Tasks settings are lost

- One file transfer resets these settings:
  - Alarm Tone/Video, Secret, S! Friend's Status

### ? Bookmarks are not saved properly

- Large Bookmarks may not be received correctly.
- Streaming Bookmarks are saved as Yahoo! Keitai Bookmarks.

### ? Messages are not saved properly on handset

- Messages may not be received depending on the size.
- Messages received via One File Transfer are saved to Other Documents folder and cannot be used as messages.
- Sky Mail may be received as S! Mail when transferred from other SoftBank handsets via All File Transfer.
- In All File Transfers, overwriting messaging folders deletes sort keys.

### ? Messages are not saved properly on recipient devices

- Mail Notices are saved as messages, invalidating complete message retrieval.
- When sending messages to other handset models via All File Transfer, Spam Folder messages may be saved to the incoming message folder.
- When sending messages in Drafts to other handset models via All File Transfer, only the first entered recipient may remain or SMS addressed to multiple recipients may not be saved.

### ? Cannot find files in DCIM folder

- Received files in DCIM folder are saved to Pictures folder.

## Infrared

### ? Infrared transfer fails

- Infrared Port may be obstructed by dust, etc.; clean with a soft cloth.
- Transfers may fail in direct sunlight, under fluorescent lighting or near infrared equipment.



## Backup & Restore

### ? Backup fails

- Check handset/Memory Card memory; backup may fail if the memory is low.

### ? Some files are not restored

- If storage limit is reached during Restore, remaining files will not be restored.

### ? Cannot use backup files on other SoftBank handsets or PCs

- Some backup files may not be usable on other SoftBank handsets or PCs.

### ? Cannot open backup files

- Some backup files may open only after being restored to handset.

### ? Phone Book settings are lost

- Picture setting may be lost depending on image; send the image separately and reassign it.

### ? Messages are not saved properly

- Transfer may delete sort keys.
- Mail Notices are restored as messages, invalidating complete message retrieval.

### ? Bookmarks are not saved properly

- Yahoo! Keitai, Streaming and PC Site Browser Bookmarks are all backed up as a single file.
- Streaming Bookmarks are saved as Yahoo! Keitai Bookmarks.

## ■ Exporting Backed Up Data to Other SoftBank Handsets

### ? Messages are not saved properly

- If spam filter is available on recipient handset, Spam Folder messages are saved in spam folder regardless of the setting. (If unavailable, they are saved as normal received messages.)
- When restoring draft messages, only the first entered recipient may remain or SMS addressed to multiple recipients may not be saved.

## ■ Importing Data Backed Up on Other SoftBank Handsets

### ? Messages are not saved properly

- Messages may not be restored depending on the size.
- Sky Mail may be restored as S! Mail.

