

<b>Calendar &amp; Tasks .....</b>	<b>11-2</b>
Calendar .....	11-2
Tasks .....	11-6
<b>Alarms .....</b>	<b>11-8</b>
Using Alarms .....	11-8
<b>Wakeup TV .....</b>	<b>11-10</b>
Using Wakeup TV .....	11-10
<b>Relaxation Time .....</b>	<b>11-12</b>
Playing Animation with Music & Illumination .....	11-12
<b>Calculator .....</b>	<b>11-13</b>
Using Calculator .....	11-13
<b>Expenses Memo .....</b>	<b>11-14</b>
Adding Expenses .....	11-14
<b>Osaifu-Keitai® .....</b>	<b>11-15</b>
Osaifu-Keitai® (Japanese) .....	11-15
Locking IC Card .....	11-16
<b>Simulated Call .....</b>	<b>11-19</b>
Faking Incoming Calls .....	11-19
<b>Stopwatch .....</b>	<b>11-20</b>
Using Stopwatch .....	11-20
<b>Countdown Timer .....</b>	<b>11-21</b>
Using Countdown Timer .....	11-21
<b>World Clock .....</b>	<b>11-22</b>
Opening World Clock .....	11-22
<b>Hour Minder .....</b>	<b>11-23</b>
Using Hour Minder .....	11-23

<b>Pedometer .....</b>	<b>11-24</b>
Using Pedometer .....	11-24
<b>Compass .....</b>	<b>11-26</b>
Using Compass .....	11-26
<b>S! GPS Navi .....</b>	<b>11-27</b>
Using S! GPS Navi .....	11-27
<b>Document Viewer .....</b>	<b>11-30</b>
Opening PC Documents .....	11-30
<b>Notepad .....</b>	<b>11-31</b>
Saving Text .....	11-31
<b>ASCII Art .....</b>	<b>11-32</b>
Using ASCII Art .....	11-32
<b>Voice Recorder .....</b>	<b>11-33</b>
Recording/Playing Voice .....	11-33
<b>Scan Barcode .....</b>	<b>11-34</b>
Scanning Barcodes .....	11-34
<b>Create QR Code .....</b>	<b>11-35</b>
Creating QR Codes .....	11-35
<b>Scan Card .....</b>	<b>11-36</b>
Scanning Business Cards .....	11-36
<b>Scan Text .....</b>	<b>11-37</b>
Scanning Text .....	11-37
<b>Kanji Grabber .....</b>	<b>11-38</b>
Using Kanji Grabber .....	11-38
<b>Additional Functions .....</b>	<b>11-39</b>
<b>Troubleshooting .....</b>	<b>11-52</b>

# 11

## Handy Extras

## Calendar

### Opening Calendar

- 1** **MENU** ➔ **Tools** ➔ In PIM/  
Life menu, **Calendar**



Calendar Window

- Tap Display to highlight date.

### Toggling View

Tap **Switch** to toggle Calendar window:




1Month View



3Month View



6Month View



Week View

### Key Assignments

#### ■ All Views

Open Previous Page	
Open Next Page	
Open Help	

#### ■ 1Month/3Month View

Select Date	
Go to Current Date	

#### ■ 6Month View

Go to Current Month	
Select Month	

#### ■ Week View

Select Date	
Select Time Block	

### Advanced

- Changing default view
- Jumping to specified date
- Setting date color
- Selecting task view option
- Adding stamps (1Month/3Month View)
- Hiding schedules
- Saving additional holidays
- Hiding/showing holidays (P.11-39)

## Saving Schedules

Follow these steps to save subject, Category, start/end date/time, Alarm and schedule details:


(Enter Subject or Description to save entry.)

- 1 In Calendar window, select date




- 2 <Add New Entry>

- 3 Enter subject ➔ Done

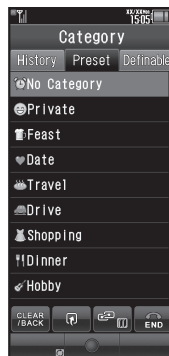

- 4 Preset tab ➔ Select Category

- 5 Enter start date/time ➔ Accept



- 6 End: ➔ Enter end date/time ➔ Accept

- 7 Alarm:

- 8 Alarm Time: ➔ Select time ➔ Confirm

- 9 Description: ➔ Enter schedule details ➔ Done

- 10 Save ➔ Saved

Selecting Category from History

In 4, History tab ➔ Select Category ➔ From 5

Selecting Custom Category

In 4, Definable tab ➔ Select Category ➔ From 5

All-Day Schedule

In 5, Check ☒ ➔ Accept ➔ From 9

Custom Alarm Time

In 8, Alarm Time: ➔ Other ➔ Enter date/time ➔ Accept ➔ Confirm ➔ From 9

## Advanced

- Setting Location
- Creating Categories
- Saving repetitive schedules
- Editing entries
- Setting Alarm tone/video & duration
- Setting Alarm volume
- Selecting Vibration option (And more on P.11-40)

**At Alarm Time**

Alarm activates; sounds/vibrates by related settings.

**Stopping Alarm to Return to Standby**

- While Alarm sounds/vibrates, tap **Stop**.

**Stopping Alarm to Open Schedule**

- While Alarm sounds/vibrates, tap **View**.

**When Another Function is Active**

- Alarm may not activate until handset returns to Standby.

**Incoming Calls**

- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

**Opening Schedules/Tasks****1 In Calendar window, select date**

Schedule List

**2 Select schedule or task****3 END → Standby returns****Opening Task List**

In 2, highlight task → **Options** → **Go to Tasks**

**Accessing Secret Entries**

[Calendar Window] **Options** → **Unlock Temporarily** → Enter Handset Code → **OK**

**Opening Related Message**

Open schedule-related messages saved from Messaging message list.

**1 In schedule list, select schedule****2 Options → Related Mail**

- Related message opens.
- To return to schedule window, tap **CLEAR/BACK**.

**Deleting Message from Schedule**

After 1, **Edit** → **Related Mail**: → **Yes** → **Save**

**Advanced****1**

- Searching entries ● Checking memory status ● Deleting all entries ● Deleting entries by specifying week (Week View) ● Deleting entries by specifying month (1Month/3Month View) ● Deleting entries in six months (6Month View) (P.11-41)

## Information Link

Set to show or hide the following information in Calendar.

<b>Reservation List</b>	TV Timer and TV Recording Timer entries
<b>Birthday</b>	Birthdays entered in Phone Book
<b>What is today? (Japanese)</b>	Preset anniversaries, commemorative days, etc.

- 1 In Calendar window, *Options*
- 2 *Calendar Settings* ➔ *Data to Show*
- 3 Select item (☐/ ☒)
- 4 *Confirm*

## Editing TV Timer/TV Recording Timer

- 1 In schedule list, highlight entry ➔ *Options*
- 2 *Edit*
- 3 *Edit* ➔ *Save*

## Deleting Entries

- In ❷, *Delete* ➔ *Yes*
- Timer is canceled.

## Making Birthday Calls

- 1 In schedule list, highlight entry ➔ *Options*
- 2 *Call* ➔ Select phone number
  - Omit number selection step if only one number is saved.

## Sending Birthday Messages

- In ❷, *Mail* ➔ *Complete message* ➔ *Send*

## Deleting Schedules

## ■ One Entry

- 1 In schedule list, highlight schedule ➔ *Options*
  - 2 *Delete* ➔ *This Appointment* ➔ *Yes*
- All Entries of the Day
- 1 In Calendar window, highlight date ➔ *Options*
  - 2 *Delete* ➔ *All This Day* ➔ *Yes*

# Tasks

## Saving Tasks


Follow these steps to save subject, due date/time, Alarm and task details:  
(Enter Subject or Description to save entry.)

- 1 MENU ➔ Tools ➔ In PIM/  
Life menu, Tasks**



- 2 <Add New Entry>**


- 3 Enter subject ➔ Done**

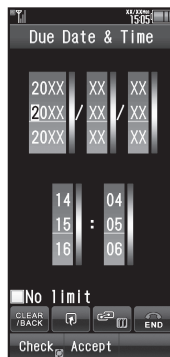

- 4 Enter due date/time ➔ Accept**



- 5 Alarm:**



- 6 Alarm Time: ➔ Select time  
➔ Confirm**

- 7 Description: ➔ Enter task  
details ➔ Done**

- 8 Save ➔ Saved**

### Task with No Due Date/Time

In **4**, Check (✓) ➔ Accept ➔ From **7**  
Custom Alarm Time

In **6**, Alarm Time: ➔ Other ➔ Enter  
date/time ➔ Accept ➔ Confirm ➔  
From **7**

## Advanced

1

- Hiding tasks ● Editing tasks ● Setting priority ● Setting Alarm tone/video & duration ● Setting Alarm volume ● Selecting Vibration option ● Sounding Alarm tone even in Manner mode (P.11-41 - 11-42)

**At Alarm Time**

Alarm activates; sounds/vibrates by related settings.

**Stopping Alarm to Return to Standby**

- While Alarm sounds/vibrates, tap **Stop**.

**Stopping Alarm to Open Task**

- While Alarm sounds/vibrates, tap **View**.

**When Another Function is Active**


- Alarm may not activate until handset returns to Standby.

**Incoming Calls**

- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

**Opening Tasks**

- MENU** ➔ **Tools** ➔ In PIM/ Life menu, **Tasks**



Task List

- Completed and Incomplete tasks appear on separate tabs.

- Select task**



- END** ➔ Standby returns

**Accessing Secret Entries**

After ①, **Options** ➔ **Unlock Temporarily**  
➔ Enter Handset Code ➔ **OK**

**Marking Tasks as Completed**

After ①, highlight task ➔ **Done**

**Deleting Tasks****One Entry**

- In task list, highlight task ➔ **Options**

- Delete**

- This Task** ➔ **Yes**

**All Completed Tasks**

- In task list, **Options**

- Delete**

- All Comp. Tasks** ➔ **Yes**

**Advanced**

- 👉 ● Searching tasks ● Sorting tasks by priority ● Checking memory status ● Deleting all tasks (P.11-42)

## Using Alarms

### Setting Alarm

Follow these steps to set Alarm to sound at a specific time on a specific day of the week: (Set Snooze--Alarm repeats at set interval--Alarm Volume and Duration.)

- 1 MENU ➔ Tools ➔ In PIM/ Life menu, Alarms**



Alarm List


- 2 --:-- ➔ Enter hour (24-hour format) ➔ Enter minutes ➔ Accept**



- 3 Repeat:**



- 4 Selected Days**



- 5 Select day (☐/☑) ➔ Complete selection ➔ Confirm**

- 6 Snooze:**

- 7 Select interval**

• For custom intervals, select *Other*.

- 8 Alarm Volume:**

- 9 Adjust level ➔ Accept**

- 10 Duration:**

- 11 Select time**

• For custom Duration, select *Other*.

- 12 Save ➔ Saved**

• For more settings, repeat 2 - 12.

- 13 END ➔ Standby returns**

**Activating Alarm Once or Daily**

In 4, *Once* or *Every Day (All)* ➔ From 6

**Selecting/Canceling All Days**

In 6, *Options* ➔ *Check All* or *Uncheck All*

**Excluding Holidays**

In 6, select day (☐/☑) ➔ Complete selection ➔ *Except Holidays* ➔ *Confirm* ➔ From 6

### Advanced


1

- Editing entries • Saving entry name • Setting Alarm tone/video • Setting handset to vibrate at Alarm Time • Sounding Alarm tone even in Manner mode • Activating Alarm based on World Clock time (P.11-42)



## At Alarm Time

Alarm activates; sounds/vibrates by related settings.



### Stopping Alarm

- Tap **Stop**.

### When Another Function is Active

- Alarm may not activate until handset returns to Standby.

### Incoming Calls

- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

## When Snooze is Set

Alarm repeats at the set interval. Other Alarms do not activate while handset is Snoozing.

### Canceling Snooze

While Snoozing, **Stop** ➔ **Yes**

- Snooze is automatically canceled after a period of time.

## Canceling Alarm

- 1 In Alarm list, highlight entry ➔ **Options**

- 2 **Switch Off**

- Reactivate entry to use the same settings.

### Reactivating Entry

In ❷, **Switch On**

## Deleting Alarm

### One Entry

- 1 In Alarm list, highlight entry ➔ **Options**

- 2 **Reset Alarm**

- 3 **Yes**

### All Entries

- 1 In Alarm list, highlight entry ➔ **Options**

- 2 **Clear All**

- 3 Enter Handset Code ➔ **OK** ➔ **Yes**

## Using Wakeup TV

### Setting Wakeup TV

Follow these steps to activate TV at a specific time on a specific day of the week:

- Complete TV Area Setup beforehand.
- TV may not activate in poor signal conditions.

#### 1 MENU ➔ Tools ➔ In PIM/ Life menu, *Wakeup TV*



Wakeup TV List


#### 2 --:-- ➔ Enter hour (24-hour format) ➔ Enter minutes ➔ *Accept*



Wakeup TV Menu

#### 3 Repeat:

#### 4 Selected Days



#### 5 Select day (☐/☑) ➔ Complete selection ➔ *Confirm*

#### 6 Channel:

#### 7 Select channel

#### 8 Save ➔ Saved

- For more settings, repeat 2 - 8.

#### 9 END ➔ Standby returns

#### Activating TV Once or Daily

In 4, *Once* or *Every Day (All)* ➔  
From 6

#### Selecting/Canceling All Days

In 5, *Options* ➔ *Check All* or  
*Uncheck All*

#### Excluding Holidays

In 5, select day (☐/☑) ➔ Complete  
selection ➔ *Except Holidays* ➔  
*Confirm* ➔ From 6

#### Canceling Alarm

• Alarm activates at Wakeup TV time. To  
cancel Alarm, follow these steps:  
[Wakeup TV Menu] *Alarm On/Off*: ➔  
*Off* ➔ From 6

#### Adjusting Alarm Volume


[Wakeup TV Menu] *Alarm Volume*: ➔  
*Adjust level* ➔ *Accept* ➔ From 6

### Advanced

- Editing entries
- Setting Alarm tone/video
- Sounding Alarm tone even in Manner mode (P.11-43)

## At Wakeup TV Time

TV activates after Alarm.



### Stopping Alarm Instantly

- While Alarm sounds/vibrates, tap **StartTV**.

### When Another Function is Active

- TV may not activate depending on the function.

### After TV is On for a Period of Time

- A confirmation appears. Tap **Yes** to exit TV.

## Canceling Wakeup TV

- 1 In Wakeup TV list, highlight entry ➔ **Options**

- 2 **Wakeup TV Off**

- Reactivate entry to use the same settings.

### Reactivating Entry

In ❷, **Wakeup TV On**

## Deleting Wakeup TV

### ■ One Entry

- 1 In Wakeup TV list, highlight entry ➔ **Options**

- 2 **Reset Alarm**

- 3 **Yes**

### ■ All Entries

- 1 In Wakeup TV list, highlight entry ➔ **Options**

- 2 **Clear All**

- 3 Enter Handset Code ➔ **OK**  
➔ **Yes**

## Playing Animation with Music & Illumination

Play preset animations or downloaded Flash® files with music and illumination. Set playback time, volume and illumination pattern as needed.

**1** **MENU** ➔ **Tools** ➔ In PIM/  
Life menu, *Relaxation Time*

**2** **Select type**

- Animation appears.
- For **Flash®**, tap a file.
  - Key LEDs do not illuminate for soundless Flash® files.

### Setting Relaxation Time

Follow these steps to set playback time, volume and Key Illumination pattern:

**1** **MENU** ➔ **Tools** ➔ In PIM/  
Life menu, *Relaxation Time*

**2** **Settings**



**3** **Playback Time**

**4** **Select time**

- For custom playback time, select **Other**.

**5** **Volume**

**6** **Adjust level** ➔ **Accept**

**7** **Set Key Illumi**



**8** **Key Pattern**

**9** **Select pattern** ➔ **Confirm**


**10** **END** ➔ **Standby returns**

### Disabling Key Illumination

In **3**, **Set Key Illumi** ➔ **Switch On/Off**  
➔ **Off** ➔ **Confirm**

# Using Calculator

- 1 **MENU** ➔ **Tools** ➔ **In PIM/**  
**Life menu, Calculator**

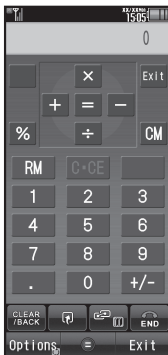

Calculator Window

- 2 **Enter digits** ➔ **Calculate**
- 3 **END** ➔ **Standby returns**

## Key Assignments

<b>+</b> (Add)	
<b>-</b> (Subtract)	
<b>×</b> (Multiply)	
<b>÷</b> (Divide)	
<b>=</b> (Sum)	
<b>C-CE</b> (Clear)	
<b>CM</b> (Clear Memory)	
<b>RM</b> (Recall Memory)	
<b>M+</b> (Add to Memory)	
<b>.</b> (Decimal)	
<b>+/-</b> (Positive/Negative Value)	
<b>%</b> (Percentage)	

## Memory Calculation

- Clear Memory before starting new Memory calculations.
- Numbers saved in Memory remain until handset is powered off.

## Incoming Calls

- Calculations are not affected. End the call to return to Calculator.

## Using % Function

Use to find definite percentage of a known value.

Example: Calculate 30% of 800,000

- Enter **800,000** ➔ **x** ➔ **30** ➔ **%**  
■ **240,000** appears.

## Advanced

- Copying calculation results
- Changing exchange rate for currency conversion
- Converting currencies (P.11-43)

## Adding Expenses

### Entering Expenses

- 1 **MENU** ➔ *Tools* ➔ In PIM/  
Life menu, *Expenses Memo*
- 2 **Add New Expense** ➔ Enter  
amount
- 3 **Accept**



- 4 **Select Category** ➔ **Saved**

Saving under Custom Category


In 4, *Other* ➔ Enter name ➔ *Done*

### Checking Entries

- 1 **MENU** ➔ *Tools* ➔ In PIM/  
Life menu, *Expenses Memo*



- 2 **Totals**



Expenses Memo List

- 3 **END** ➔ Standby returns

Saving Entries to Notepad

[Expenses Memo List] *Options* ➔  
*Save to Notepad*

- All expense details are saved as a  
single entry.

### Deleting Entries

- One Entry

- 1 In Expenses Memo list,  
highlight entry ➔ *Options*

- 2 **Delete Item**

- 3 **Yes**

- All Entries

- 1 In Expenses Memo list,  
*Options*

- 2 **Delete All**

- 3 **Enter Handset Code** ➔ *OK*  
➔ **Yes**

### Advanced

- Changing Category of saved entry ● Changing amount ● Renaming Categories (P.11-43)

## Osaifu-Keitai® (Japanese)

Osaifu-Keitai® describes IC Card-equipped handsets that support e-money or credit functions/services. Osaifu-Keitai® encompasses a range of IC Card-based services on FeliCa-compatible SoftBank handsets. 941SH supports Osaifu-Keitai®. To use e-money, e-ticketing and reward points, etc., hold handset over a compatible reader/writer at shops, restaurants, and other retail outlets, etc.

### Basics

Before using Osaifu-Keitai®, activate Lifestyle-Appli, complete registration, customize settings and charge accounts.

#### Starting Lifestyle-Appli

**MENU** ➔ **Tools** ➔ In PIM/Life menu, **Osaifu-Keitai** ➔ **Lifestyle-Appli** ➔ **Select application**

#### Important Lifestyle-Appli Usage Notes

- Contact Osaifu-Keitai® service providers for Lifestyle-Appli registration and usage details.
- Keep service passwords/customer service contact information, etc. in a separate place.


### Using Osaifu-Keitai®

Follow these steps to conduct a transaction:

Example: Making an electronic payment

- Lifestyle-Appli activation is not necessary.
- Transactions are possible even when handset power is off (if battery is adequately charged).
- Calls/Internet transmissions do not affect transactions.

#### 1 Place logo over reader/writer ➔ Confirm scan results



Place this part  
over reader/writer

- Align handset parallel to reader/writer.

### Important Osaifu-Keitai® Usage Note

- SoftBank Mobile is not liable for damages resulting from accidental loss/alteration of IC Card data/settings.

#### When Placed Over Sensor

- If recognition is slow, move handset around slightly.
- Handset may respond automatically for some services.

### Advanced


-  ● Enabling to view e-money balances ● Moving applications up/down Balance Info list ● Removing applications from Balance Info list (P.11-43)

# Locking IC Card


## IC Card Lock

Restrict access to/prevent unauthorized use of Osaifu-Keitai® on handset.

- 1** **MENU** ➔ **Tools** ➔ **In PIM/**  
**Life menu, Osaifu-Keitai**

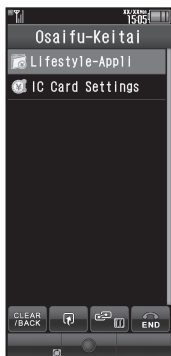

## **2** **IC Card Settings**



IC Card Settings Menu

## **3** **IC Card Lock** ➔ **On**

## **4** **Enter Handset Code** ➔ **OK** ➔ **Yes**

### Canceling IC Card Lock

In ☺, **IC Card Lock** ➔ **Off** ➔ Enter  
Handset Code ➔ **OK**

## Advanced

1

- ☞ Customizing handset response to reader/writer commands ☞ Opening IC Card properties ☞ Setting IC Card Lock notice recipient ☞ Setting required  
Missed Call count for Call Remote Lock ☞ Restoring default Osaifu-Keitai® settings (P.11-44)



## Remote Lock


Disable Osaifu-Keitai® remotely by mail or phone.

<b>Mail Remote Lock</b>	Send mail to activate Remote Lock
<b>Call Remote Lock</b>	Call from a specified phone to activate Remote Lock


### Mail Remote Lock

#### ■ Preparation on Handset

- 1 **MENU** ➔ **Tools** ➔ In PIM/Life menu, *Osaifu-Keitai*
- 2 **IC Card Settings**
- 3 **Remote Lock** ➔ Enter Handset Code ➔ **OK**



## 4 Mail Remote Lock



Mail Remote Lock Menu

- 5 **Remote Lock PW**
- 6 Enter password ➔ **Done**
- 7 **Switch On/Off**
- 8 **On** ➔ **Save**

Canceling Mail Remote Lock  
In 5, **Switch On/Off** ➔ **Off** ➔ **Save**

#### ■ Activating Remote Lock via Mail

If handset cannot receive mail IC Card Lock is not set.

## 1 Send S! Mail or e-mail to handset with password as subject

- After handset receives message, IC Card Lock is set and notice is sent as a reply.


## Call Remote Lock

### ■ Preparation on Handset


**1** **MENU** ➔ **Tools** ➔ In PIM/  
Life menu, **Osaifu-Keitai**

**2** **IC Card Settings**

**3** **Remote Lock** ➔ Enter  
Handset Code ➔ **OK**




**4** **Call Remote Lock**



Call Remote Lock Menu

**5** **Phone No. to Lck 1 or  
Phone No. to Lck 2**



**6** **Phone Book** ➔ **Select entry**  
➔ **Select phone number**

- Select **Phone Number** to enter directly.

**7** **Switch On/Off**

**8** **On** ➔ **Save**

### Enabling Activation via Public Phone

In **☺**, **Set Public Phone** ➔ **On** ➔  
**From** **☑**

### Canceling Call Remote Lock

In **☺**, **Switch On/Off** ➔ **Off** ➔ **Save**

### ■ Activating Remote Lock via Phone

If handset cannot receive calls IC Card  
Lock is not set.


**1** **Using one of the specified  
phones, call handset**

- Send Caller ID.

**2** **Handset receives call** ➔  
**End the call**

- The call is recorded as a Missed Call.

**3** **Within three minutes, repeat**  
**1 - 2 twice**



- After the third Missed Call, IC Card  
Lock is set; a message announces  
Remote Lock activation. Confirm the  
message and end the call.

### If Series is Interrupted by Another Call

- Missed Call count is reset. Start over  
from the beginning.

# Faking Incoming Calls

Handset rings to emulate an incoming call.

- Save name and phone number to show as Caller ID.
- Ringer may be muted by handset settings. To override Silent setting, see P.11-44.

## Setting Simulated Call


- 1 MENU ➔ Tools ➔ In PIM/Life menu, *Simulated Call***



Simulated Call Menu

- 2 Switch On/Off ➔ On**

- 3 Set Caller**



- 4 Name: ➔ Enter name ➔ Done**

- 5 Phone Number: ➔ Enter phone number ➔ Done ➔ OK**

- 6 Assign Tone ➔ Select tone/file**

- 7 Save ➔ PIM/Life menu returns**

**When Name and Phone Number are Unset**

- Handset rings with Caller ID "Withheld."

**Canceling Simulated Call**

[Simulated Call Menu] **Switch On/Off**  
➔ Off ➔ Save

**Setting Wait Time**

[Simulated Call Menu] **Receive Timing** ➔ Select time ➔ Save

## Using Simulated Call

- 1 Long Touch**

- Handset rings and incoming Voice Call window opens.
- Ringtone stops after a period of time.

- 2 In incoming Voice Call window, *Answer***

- Voice Call window opens. (Softkeys are dummies.)

- 3 End Call ➔ Standby returns**

**When Receive Timing is Not *Immediately***

- Tap **END** or **CLEAR/BACK** during wait time to cancel Simulated Call activation.
- Simulated Call activation is canceled by incoming calls, Alarms, etc. during wait time.


## Advanced

- Starting via Simulated Call menu ● Clearing caller information ● Overriding Silent volume setting (P.11-44)

## Using Stopwatch

Stopwatch stops if battery runs low.

- 1 MENU ➔ Tools ➔ Clock/  
Gauge tab ➔ Stopwatch**



Stopwatch Window

- 2 Start ➔ Stopwatch starts**
- 3 Stop ➔ Stopwatch stops**
  - Tap *Resume* to resume.
- 4 END ➔ Yes ➔ Stopwatch ends**
  - Records are deleted when Stopwatch ends.

### Recording Lap Times

While Stopwatch is running, *Measure*  
Saving Records to Notepad

After ③, *Options* ➔ *Save to Notepad*

### Resetting Records


After ③, *Reset* ➔ *From* ②

### Incoming Calls

- Stopwatch is not affected by incoming calls. End the call to return.

## Using Countdown Timer

- 1** **MENU** ➔ **Tools** ➔ **Clock/Gauge** tab ➔ **Countdown Timer**




Timer Entry Window

- 2** **Enter minutes** ➔ **Enter seconds**

- Tap **+10min**, **+1min** or **+30sec** as needed.

- 3** **Accept**



Countdown Timer Window

- Tap **Edit** to change time.

- 4** **Start** ➔ **Countdown starts**

- Tap **Pause** to stop countdown; tap **Resume** to continue countdown.

- 5** **Set time elapses** ➔ **Tone sounds**

- 6** **END** ➔ **Yes** ➔ **Countdown Timer ends**

### Using Timer Records

[Timer Entry Window] Select record

➔ **From** ⌚


### Resetting Countdown Timer

Before countdown, **Edit** ➔ **Reset Incoming Calls**

- Countdown is not affected by incoming calls. End the call to return.

### When Set Time Elapses

Tone sounds.



### Stopping Tone Instantly

- Tap **Stop**. (Tone stops automatically after a period of time.)

### When Timer Time Elapsed during a Call


- Tone sounds after the call.

## Opening World Clock

- ① **MENU** ➔ **Tools** ➔ **Clock/Gauge** tab ➔ **World Clock**



- ② **Edit**



Set Time Zone Window

- ③ Tap approximate target area on map ➔ **Select area** ➔ **Accept**

- ④ **END** ➔ Standby returns

### Advancing One Hour (Daylight Saving)

[Set Time Zone Window] **Summer**

- To cancel, tap **Summer**.

### Adding Custom Time Zone

[Set Time Zone Window] **Custom** ➔

Enter city name ➔ **Done** ➔ Enter time difference ➔ **Accept**

## Opening World Clock in Standby

- ① **MENU** ➔ **Settings** ➔ In Sound/Display menu, **Display**

- ② **Standby Display**



- ③ **Clock/Calendar**

- ④ **World Clock (L)**, etc.

- ⑤ **END** ➔ Standby returns

# Using Hour Minder

## Setting Hour Minder


Follow these steps to activate the hourly time signal at selected hours:

- 1 MENU** ➔ **Tools** ➔ **Clock/Gauge tab** ➔ **Hour Minder**



Hour Minder Menu

- 2 Switch On/Off** ➔ **On**
- 3 Select Time**



- 4 Select hour** (☐/☑) ➔ **Complete selection** ➔ **Confirm**

- 5 Save** ➔ **Saved**

- 6 END** ➔ Standby returns

### Adjusting Hour Minder Volume

In **2, Advanced** ➔ **Volume:** ➔ **Adjust level** ➔ **Accept** ➔ **Confirm** ➔ **From 5**

### Changing Hour Minder Duration


In **2, Advanced** ➔ **Duration:** ➔ **Select time** ➔ **Confirm** ➔ **From 5**  
 ■ For custom Duration, select **Other**.

### Selecting/Canceling All Hours

In **4, Options** ➔ **Check All** or **Uncheck All**

## At Hour Minder Time

Hour Minder activates; sounds/vibrates by related settings.



### Stopping Tone Instantly

- Tap **Stop**.

### When Another Function is Active

- Hour Minder does not activate.

### Incoming Calls

- Active Hour Minder stops for incoming calls.

## Canceling Hour Minder

- 1 In Hour Minder menu, Switch On/Off** ➔ **Off** ➔ **Save**

## Advanced

- Setting Hour Minder tone/video ● Setting handset to vibrate at Hour Minder Time ● Sounding Hour Minder tone even in Manner mode ● Activating Hour Minder based on World Clock time (P.11-44 - 11-45)

## Using Pedometer

### Getting Started

- Count based on a pace of approximately 100 steps per minute over even terrain.
- Accuracy may be affected by course, terrain, walking style, etc.
- Avoid holding the handset; use a body worn case or a strap, or place handset inside a pocket or bag.
  - Avoid sudden/erratic movements.
- Steps are not counted in the following cases:
  - While handset is off
  - For the first few steps
  - While handset vibrates
- Handset use may affect accuracy.
- Use Pedometer only as a rough guide.

### Adjusting Counter Sensitivity


**MENU** ➔ **Tools** ➔ **Clock/Gauge** tab ➔ **Pedometer** ➔ **Settings** ➔ **Step Sensitivity** ➔ **Select** option

- Select **Low** when steps seem overcounted; select **High** when they seem undercounted.

### Saving Body Information

Weight and pace entry required to view full Pedometer data.

**1** **MENU** ➔ **Tools** ➔ **Clock/Gauge** tab ➔ **Pedometer**



Pedometer Menu

**2** **Settings** ➔ **Body Info.**

**3** **Enter Handset Code** ➔ **OK**



Body Info Menu

**4** **Height** ➔ **Enter height** ➔ **Accept**

**5** **Weight** ➔ **Enter weight** ➔ **Accept**

**6** **Pace** ➔ **Yes or No**

- Choose **Yes** to enter pace automatically based on height.

**7** **Enter pace** ➔ **Accept** ➔ **Save**

### Editing Body Information

[Body Info Menu] **Select** item ➔ **Enter value** ➔ **Accept** ➔ **Save**

- For **Pace**, automatic calculation confirmation appears (when height is entered).

### Activating Pedometer

**1** **In Pedometer menu, Switch On/Off**


**2** **On**

**Canceling Pedometer**  
In **2**, **Off**



## Pedometer Indicator

When Pedometer is active, today's step count appears in Standby.



## Viewing Step Count Records

1 In Pedometer menu, *Today's Walking*

2 Log



Steps Window

- Tap or to scroll down or up by one page.

3 Select time/date

- Hourly/daily step counts appear.

4 END ➔ Standby returns

### Resetting Today's Step Count

In 2, *Options* ➔ *Reset Day's Data* ➔ Yes

### Resetting Log

[Steps Window] *Options* ➔ *Walk Data Reset* ➔ Enter Handset Code ➔ OK ➔ Yes

- Today's data is also reset.

## Setting Targets

Information window opens, etc. when target is achieved for these items:

Steps	Walking Time
Exercise	Calories
Distance	Fat burned

1 In Pedometer menu, *Settings* ➔ *Target*

2 *Target Settings*

3 Select item ➔ Enter value/time ➔ *Accept*

- Other target settings may consequently change.

### Editing Targets

[Pedometer Menu] *Settings* ➔ *Target* ➔ *Target Settings* ➔ Highlight item ➔ *Edit* ➔ Enter value/time ➔ *Accept*

### When Target is Achieved

- A tone sounds and Information window opens. (Tap **Goal Achievement** to open Pedometer Calendar.) Follow these steps to mute achievement tone:

[Pedometer Menu] *Settings* ➔ *Target* ➔ *Goal Announce* ➔ *Off*

### About Exercise (Ex)

- Ex and MET indicate amount and intensity of physical activity, respectively. Ex for walking is calculated by multiplying 3 METs by walking duration (hour).

## Advanced

- Setting Pedometer indicator
- Using Pedometer Calendar
- Checking accumulated data
- Resetting accumulated data
- Customizing achievement notice (P.11-45)

## Using Compass

### Opening Compass

- 1 **MENU** ➔ **Tools** ➔ **Clock/ Gauge tab** ➔ **Compass**



Compass Window

- Compass opens; use as a rough guide.

### Adjusting Compass

- 1 In Compass window, **Adjust** ➔ **Next**

- Follow onscreen instructions.

### Compass Indicator

- When map is open, compass indicator appears; follow these steps to hide it:  
**MENU** ➔ **Tools** ➔ **Clock/Gauge tab**  
 ➔ **S! GPS Navi** ➔ **NAVI Settings** ➔  
**Compass Indicator** ➔ **Off**

## Using S! GPS Navi

Use this GPS navigation service to pinpoint current location, find routes to destinations, and more.

Provide current location to administrator upon request.

### Precautions

- Location Information accuracy may be affected when GPS satellite/radio station signal reception is poor. Use S! GPS Navi under the open sky.
- SoftBank Mobile is not liable for any damages resulting from the provided Location Information.

### Positioning


- Pinpoints current location using signals transmitted from GPS satellites.

### Location Information Accuracy

- Probable distance from the actual position is classified into three accuracy levels, from level 1 (low) to 3 (high), indicated by the number of 📶s.
- A confirmation appears when accuracy level is 1 or 2; tap **Yes** or **No**.

### Starting Navi-Appli

- 1 MENU ➔ Tools ➔ Clock/Gauge tab ➔ S! GPS Navi**



S! GPS Navi Menu

- 2 Navi Appli**

- To disable confirmation, tap **Check** (☑) before 📶.

- 3 Yes**

### Opening Navi Appli List

[S! GPS Navi Menu] **Navi Appli List**

- To activate Navi Appli, tap one.

### Selecting a Navi-Appli for S! GPS Navi

[S! GPS Navi Menu] **NAVI Settings ➔ Select Navi Appli ➔ Select application**

## Opening Location Log

- 1 In S! GPS Navi menu, **Location Logs**




- 2 Select record

- Details appear.

- 3 **CLEAR/BACK** → List returns

## Pinpointing Current Location

- 1 In S! GPS Navi menu, **Locate Me**



- To disable confirmation, tap **Check** (✓) before 2.

- 2 **Yes** → Positioning starts


- Map of your current location appears.

## Using My Location

## Saving Location Information

Follow these steps to save current location as a new entry:

- 1 In S! GPS Navi menu, **My Location List**



My LocationList Menu

- 2 **New Entry**

- 3 **Name** → Enter name → **Done**

- 4 **Location Info**

- 5 **From Current Loc.** → Positioning complete

- 6 **OK**

- When accuracy level is 1 or 2, tap **No** to proceed to 7.

- 7 **Save**

## Saving as Home

In 2, **自宅** → From 4

## Saving from Location Log

In 5, **From Location Logs** → Select record → **Save**

## Opening Entries

- 1 In My LocationList menu, select entry

- 2 **Location Info**



- 3 **CLEAR/BACK** → Details closes

## Deleting Entries

- 1 In My LocationList menu, highlight entry

- 2 **Options** → **Delete** → **Yes**

## Advanced

- Sending current location via mail
- Setting map source URL
- Disabling positioning
- Selecting Location Information transmission option
- Using My Location & Location Log
- Saving Location Log records to My Location
- Deleting Location Log records (P.11-45 - 11-46)

## Using Ichi Navi (Japanese)

Locate other S! GPS Navi-compatible handset users or lost handset.

- Ichi Navi requires a separate contract and initial settings.
- If Double Number is active, service uses Line A regardless of usage mode setting.
- For more about Ichi Navi, see SoftBank Mobile Website (P.17-23).

### 1 In S! GPS Navi menu, *Location Navi*


- Handset connects to the Internet. Follow onscreen instructions.

## Providing Location Information

Provide current location to administrator upon request.

- Location may be provided automatically upon administrator's request without confirmation.
- May be unavailable depending on subscription. For details, contact the nearest SoftBank Shop or SoftBank Mobile Customer Center, General Information (P.17-42).

### 1 Location Information request arrives



- A confirmation appears. (Message shown above is for reference only.)

### 2 Yes (provide) or No (reject)

## Information

Information window opens after your location is provided manually (by tapping **Yes**) upon Location Information request or automatically upon administrator's request. Tap the item to open log.

## Advanced

- Suppressing Information window after sending Location Information automatically (P.11-46)

## Opening PC Documents

Supported File Formats:

PDF (.pdf)
Microsoft® Excel® (.xls)
Microsoft® Word (.doc)
Microsoft® PowerPoint® (.ppt)

- Some files may not appear correctly.
- Downloaded files are also supported.
- When transferring files from PCs, save to corresponding Memory Card folder (P.17-24).

**1** **MENU** ➔ **Tools** ➔ **Doc./Rec.**  
**tab** ➔ **Document Viewer**



**2** Select file

### Touch Panel

View Whole Page	Tap <i>Whole</i>
Rotate 90 Degrees	Tap <i>V/H</i>
Zoom Out	Tap
Zoom In	Tap
Jump to Page	Tap
Next Page	Tap
Previous Page	Tap

### Zooming In/Out with Loupe (Magnifier)

In open file, tap Display ➔ Specify portion ➔ *Options* ➔ *Zoom Out* or *Zoom In*


### Key Assignments

View Whole Page	
Scroll	
View Upper Left	
Toggle Full Screen View On/Off	
View Upper Right	
Zoom Out	
Continuous Zoom Out	(Long)/ (Long)
View Center	
Zoom In	
Continuous Zoom In	(Long)
View Lower Left	
Jump to Page	
View Lower Right	
Open Help	
Next Page	
Previous Page	
Fit Width	
Rotate 90 Degrees	

## Saving Text

### New Notepad Entry

- 1 **MENU** ➔ **Tools** ➔ **Doc./Rec. tab** ➔ **Notepad**



Notepad List

- 2 **<Add New Entry>**



- 3 Enter text ➔ **Done**

- 4 Select Category ➔ **Saved**

### Sorting Entries Temporarily

[Notepad List] **Sort**


- Tap to toggle sort options (Modified, Created, Category and Accessed).

### Changing Landscape Notepad List View

[Notepad List] Highlight entry ➔  
Options ➔ **Setting/Manage** ➔  
Landscape Display ➔ Select option  
Inserting Notepad Text during Text Entry  
[Text Entry Window] Options ➔  
Notepad ➔ **Call Notepad** ➔ Select entry

### Opening Notepad

- 1 In Notepad list, select entry



- 2 **CLEAR/BACK** ➔ List returns

### Deleting Entries

- One Entry

- 1 In Notepad list, highlight entry ➔ **Options**

- 2 **Delete Item** ➔ **Yes**

- Selected Entries

- 1 In Notepad list, highlight entry ➔ **Options** ➔ **Setting/Manage**

- 2 **Multiple Selection** ➔ Select entry (☐/✓) ➔ Complete selection ➔ **Options**

- 3 **Delete** ➔ **Yes**

### Unchecking All

In ☺, **Uncheck All**

- All Entries

- 1 In Notepad list, highlight entry ➔ **Options** ➔ **Setting/Manage**

- 2 **Delete All** ➔ Enter Handset Code ➔ **OK** ➔ **Yes**

### Advanced

- Editing Notepad
- Searching text within all entries
- Inserting Notepad text into message text
- Sending entries via S! Mail
- Creating text files
- Importing text files
- Checking memory status
- Opening properties (P.11-46 - 11-47)

## Using ASCII Art

### Inserting ASCII Art

- 1 In message text entry window, **Options** ➔ **Call ASCII Art**



- 2 Select entry



### Previewing ASCII Art

- In ❷, highlight entry ➔ **View**
- Tap **OK** to insert ASCII Art.

### Editing Entries

- 1 **MENU** ➔ **Tools** ➔ **Doc./Rec.** tab ➔ **ASCII Art**



ASCII Art List

- 2 Select entry ➔ **Edit** ➔ **Done**

### Opening Entries

- In ❷, highlight entry ➔ **Options** ➔ **View**

### Adding New Entries

- In ❷, <Empty> ➔ **Create ASCII Art** ➔ **Done**

### Deleting Entries

- 1 In ASCII Art list, highlight entry ➔ **Options** ➔ **Delete**

- 2 Yes




## Recording/Playing Voice

### Recording

- Recording stops if battery runs low while recording.
- Record conversations during calls via **Record Caller Voice**.

**1** **MENU** ➔ **Tools** ➔ **Doc./Rec.**  
tab ➔ **Voice Recorder**



Recording Window

**2** ➔ **Recording starts**

**3** ➔ **Recording ends**



- For **Extended Voice**, recording is saved automatically.

**4** **Save**

**Play Before Saving**

In **4**, **Playback** ➔ **Playback starts** ➔

**CLEAR/BACK** ➔ **Playback stops**

**Starting Over**

In **4**, **CLEAR/BACK** ➔ **From 2**

### Playback

**1** In recording window, **Options**  
➔ **Ring Songs·Tones**



**2** **Select file**

**Playing Files via Data Folder**

**MENU** ➔ **Data Folder** ➔ **Ring Songs·Tones** ➔ **Select file**

### Playback Operations

Volume Control	
Pause/Resume	
Stop	Tap <b>CLEAR/BACK</b>

### Advanced


- Saving longer recordings ● Sending Voice files via S! Mail ● Switching storage media (P.11-47)

## Scanning Barcodes

Scan UPC/JAN (1D barcodes) or QR Codes (2D barcodes).


- Membership file or password may be required when scanning barcodes.
- Some barcodes may not be scanned.

**1** **MENU** ➔ **Tools** ➔ **Doc./Rec.**  
**tab** ➔ **Barcode/Scan**



**2** **Scan Barcode**

**3** **Frame barcode in center of Display**



Focus  
Adjustment  
Bar

Scan Window

- Use Focus Adjustment Bar as a guide (better focus in darker blue).

**4** **Scan** ➔ **Scan starts**

- If recognition takes time, slowly adjust the distance between handset and barcode.
- To cancel, tap **Cancel**.

**5** **Tone sounds** ➔ **Scan results appear**



### Split Data

- After scanning, a confirmation appears. Follow onscreen prompt(s).
- Scan results do not appear until all split data is scanned.

### Starting Over

After **ESC**, **Cancel** ➔ **Yes** ➔ **From** **ESC**

### Key Assignments in Scan Window

<b>Toggle Focus Mode</b>	
<b>Switch to Photo Camera</b>	
<b>Focus Lock</b>	
<b>Mobile Light On/Off</b>	
<b>Adjust Brightness</b>	
<b>Open Help</b>	

### Advanced

- Scanning during text entry ● Scanning continuously ● Reading saved barcode images ● Saving scan results ● Saving to Notepad ● Saving linked info to Phone Book ● Opening saved scan results ● Using linked info ● Using images as Wallpaper ● Saving images & melodies ● Copying text (And more on P.11-47 - 11-49)

## Creating QR Codes

Create QR Codes from these items on handset:


Phone Book	My Details
Text Input	Ring Songs•Tones
Pictures	Notepad

Large items are divided into multiple QR Codes.

### Procedure


Follow these steps to create QR Codes from Data Folder files:

- 1 MENU ➔ Tools ➔ Doc./Rec. tab ➔ Barcode/Scan**



- 2 Create QR Code**

- 3 Data Folder**



- 4 Select folder ➔ Select file or entry**

- QR Code is created.

- 5 Save**

- QR Code is saved to Data Folder (Pictures).

### From Phone Book Entries

In **☺**, *Phone Book* ➔ Select entry ➔ **☺**

### From My Details

In **☺**, *My Details* ➔ OK ➔ **☺**

### From Entered Text

In **☺**, *Text Input* ➔ Enter text ➔

*Done* ➔ **☺**

### Switching Storage Media

In **☺**, *Options* ➔ Save to ➔ Phone or Memory Card ➔ Save

### Attaching to S! Mail

In **☺**, *Options* ➔ Send As Message ➔ Complete message ➔ Send

### Incoming Calls


- QR Code creation is not affected by incoming calls. End the call to return.

## Scanning Business Cards

Scan business cards and save names, addresses, etc. to Phone Book.

- English business cards may not be scanned correctly.
- Some cards may not be scanned.

**1** **MENU** ➔ **Tools** ➔ **Doc./Rec.**  
**tab** ➔ **Barcode/Scan**



**2** **Scan Card**

**3** **Frame card on Display**



Scan Window

**4** **Read**

- To cancel, tap **Cancel**.

**5** **Scan** ➔ **Scan results appear**



**6** **Assign** ➔ **Save**

- New Phone Book entry is saved.

**If Text Exceeds Phone Book Entry Item Character Limit**

- A confirmation appears. Tap **Yes** to delete overage.

**Switching Storage Media**

After **Ⓜ**, **Options** ➔ **Save to** ➔

Select storage media ➔ **Ⓜ**

**Saving Scanned Image as Phone Book Picture**

After **Ⓜ**, **Options** ➔ **Add Image** ➔

**On** ➔ **Ⓜ**

**Starting Over**

After **Ⓜ**, **Cancel** ➔ **Yes** ➔ **From** **Ⓜ**

### Key Assignments in Scan Window

Toggle Focus Mode	
Switch to Photo Camera	
Focus Lock	
Mobile Light On/Off	
Adjust Brightness	
Open Help	


## Scanning Text

Scan text and save it to Notepad, etc.  
Available Modes:

<b>Full</b>	Capture text in full screen and scan a selected line
<b>Line</b>	Capture a few lines of text and scan a selected line

Some text may not be scanned.


- 1 MENU** ➔ **Tools** ➔ **Doc./Rec.**  
**tab** ➔ **Barcode/Scan**



### 2 Scan Text

- To change mode, tap **Line** or **Full** in scan window.

### 3 Frame text in center of Display




Scan Window

### 4 Scan ➔ Scan starts

- To cancel, tap **Cancel**.

### 5 Highlight line ➔ Select ➔ Scan results appear

### 6 OK



### 7 Options ➔ Notepad

#### Correcting Text Type

After **3**, **Options** ➔ **Change Mode** ➔

Select type ➔ From **3**

#### Editing Scanned Text

After **3**, **Options** ➔ **Select/Edit** ➔

Select character ➔ Select alternative from list or edit directly ➔ **Done** ➔ **7**

#### Starting Over

In **3**, **Cancel** ➔ **Yes** ➔ From **3**

#### Key Assignments in Scan Window

Toggle Focus Mode	<b>3</b>
Switch to Photo Camera	<b>7</b>
Focus Lock	
Mobile Light On/Off	
Adjust Brightness	
Open Help	<b>0</b>

## Advanced


- Scanning and pasting during text entry 
 Scanning more text 
 Saving scan results 
 Saving linked info to Phone Book 
 Opening saved scan results 
 Using linked info 
 Pasting to message text 
 Copying text (P.11-50 - 11-51)

# Using Kanji Grabber

Scan a word of up to ten kanji and look it up in dictionaries.


Some text may not be scanned.

- 1** **MENU** ➔ **Tools** ➔ **Doc./Rec.**  
**tab** ➔ **Barcode/Scan**



- 2** **Kanji Grabber**

- 3** **Frame kanji in Loupe**



Loupe

Scan Window

- 4** **Select**

- Scan results (kanji) appear.

- 5** **Dict.**

- 6** **Select dictionary** ➔ **Search**

- 7** **Select word, etc.**

- Definition/translation window opens.

**Starting Over**

In **3**, **Cancel** ➔ **From 3**

## Key Assignments in Scan Window

Toggle Focus Mode	<b>3</b>
Switch to Photo Camera	<b>7</b>
Focus Lock	
Mobile Light On/Off	<b>#</b>
Adjust Brightness	
Open Help	<b>0</b>

## Advanced

- Scanning and pasting during text entry (P.11-51)

Calendar	
View Settings	
Changing default view	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Calendar Settings</i> ➤ <i>Default View</i> ➤ Select type
Jumping to specified date	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Go to</i> ➤ Enter Date ➤ Enter date ➤ Accept
Setting date color	<small>(Start Here)</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ See below
	<b>By Days of the Week</b> <i>Options</i> ➤ <i>Calendar Settings</i> ➤ <i>Set Color</i> ➤ <i>By Week</i> ➤ Select day ➤ Select color
	<b>By Date</b> Highlight date ➤ <i>Options</i> ➤ <i>Calendar Settings</i> ➤ <i>Set Color</i> ➤ <i>By Date</i> ➤ Select color • Not available in 6Month View.
	<b>Resetting "By Date" Colors</b> <i>Options</i> ➤ <i>Calendar Settings</i> ➤ <i>Set Color</i> ➤ <i>Reset Color</i> ➤ Select option ➤ Yes
Selecting task view option	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Calendar Settings</i> ➤ <i>Tasks View</i> ➤ Select option
Adding stamps (1Month/3Month View)	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ Highlight date ➤ <i>Stamp</i> ➤ Select stamp
Hiding schedules	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ Select date ➤ Select entry ➤ <i>Edit</i> ➤ <i>Secret</i> : ➤ On ➤ Save

Saving additional holidays	<small>(Start Here)</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Calendar Settings</i> ➤ <i>Set Holiday</i> ➤ <i>Private</i> tab ➤ See below
	<b>Adding Holidays</b> <Empty> ➤ Enter name ➤ <i>Done</i> ➤ Enter date ➤ <i>Accept</i> ➤ Select frequency ➤ <i>Save</i>
	<b>Editing Added Holidays</b> Highlight holiday ➤ <i>Options</i> ➤ <i>Edit</i> ➤ <i>Name</i> : ➤ Enter name ➤ <i>Done</i> ➤ <i>Date</i> : ➤ Enter date ➤ <i>Accept</i> ➤ Select frequency ➤ <i>Save</i>
Hiding/showing holidays	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Calendar Settings</i> ➤ <i>Set Holiday</i> ➤ <i>Private</i> or <i>Public</i> tab ➤ Select holiday ( <input type="checkbox"/> / <input checked="" type="checkbox"/> )

## ■ Saving/Editing Schedules

Setting Location	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ Select date ➤ Select entry ➤ <i>Edit</i> ➤ <i>Location:</i> ➤ Enter location ➤ <i>Done</i> ➤ <i>Save</i>
Creating Categories	<small>(Start Here)</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Calendar Settings</i> ➤ <i>Set Category</i> ➤ See below
	<b>Renaming Categories</b> Select Category ➤ <i>Edit Category Name</i> ➤ Enter name ➤ <i>Done</i>
	<b>Changing Icons</b> Select Category ➤ <i>Change Icon</i> ➤ Select Pictogram
	<b>Resetting</b> <i>Options</i> ➤ <i>Reset Settings</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ <i>Yes</i>
Saving repetitive schedules	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ Select date ➤ Select entry ➤ <i>Edit</i> ➤ <i>Repeat:</i> ➤ Select frequency ➤ Enter repeat time ➤ <i>Accept</i> ➤ <i>Save</i> • Repeat time is not available for <i>Every Year</i> .
Saving S! Friend's Status information	<small>(Start Here)</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ Select date ➤ Select entry ➤ <i>Edit</i> ➤ <i>S! Friend's Status:</i> ➤ <i>Link Setting:</i> ➤ <i>Linked</i> ➤ See below
	<b>Availability</b> <i>Answer Status:</i> ➤ <i>Edit</i> ➤ <i>Confirm</i> ➤ <i>Confirm</i> ➤ <i>Save</i> • Set Category first.
	<b>Comment</b> <i>Comment:</i> ➤ Enter text ➤ <i>Done</i> ➤ <i>Confirm</i> ➤ <i>Save</i> • Set Category first.

Editing entries	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ Select date ➤ Select entry ➤ <i>Edit</i> ➤ Select item ➤ Edit in the same manner as saving schedules ➤ <i>Save</i>
Setting Alarm tone/video & duration	<small>(Start Here)</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ Select date ➤ Select entry ➤ <i>Edit</i> ➤ <i>Alarm:</i> ➤ See below
	<b>Alarm Tone/Video</b> <i>Assign Tone/Video:</i> ➤ Select folder ➤ Select tone/file ➤ <i>Confirm</i> ➤ <i>Save</i> • Select start point if required.
	<b>Duration</b> <i>Duration:</i> ➤ Select time ➤ <i>Confirm</i> ➤ <i>Save</i>
Setting Alarm volume	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Alarm Settings</i> ➤ <i>Alarm Volume:</i> ➤ Adjust level ➤ <i>Accept</i>
Selecting Vibration option	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Alarm Settings</i> ➤ <i>Vibration:</i> ➤ Select option
Sounding Alarm tone even in Manner mode	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Alarm Settings</i> ➤ <i>For Manner Mode:</i> ➤ <i>Ring</i> ➤ <i>Yes</i>



## ■ Managing Schedules

Searching entries	<b>[Start Here]</b> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Find</i> ➤ See below
	<b>By Part of Subject</b> <i>By Subject</i> ➤ Enter text ➤ <i>Done</i>
	<b>By Category</b> <i>By Category</i> ➤ Select Category
Checking memory status	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ Highlight date ➤ <i>Options</i> ➤ <i>Memory Status</i>
Deleting all entries	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ <i>Options</i> ➤ <i>Delete</i> ➤ <i>All Appointments</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ <i>Yes</i>
Deleting entries by specifying week (Week View)	<b>[Start Here]</b> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ See below
	<b>Within One Week</b> Highlight date ➤ <i>Options</i> ➤ <i>Delete</i> ➤ <i>All This Week</i> ➤ <i>Yes</i>
	<b>Up to the End of Previous Week</b> Highlight date ➤ <i>Options</i> ➤ <i>Delete</i> ➤ <i>Up to Last Week</i> ➤ <i>Yes</i>
Deleting entries by specifying month (1Month/3Month View)	<b>[Start Here]</b> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calendar</i> ➤ See below
	<b>Within One Month</b> Highlight date ➤ <i>Options</i> ➤ <i>Delete</i> ➤ <i>All This Month</i> ➤ <i>Yes</i>
	<b>Up to the End of Previous Month</b> Highlight date ➤ <i>Options</i> ➤ <i>Delete</i> ➤ <i>Up to Last Month</i> ➤ <i>Yes</i>

Deleting entries in six months (6Month View)

*MENU* ➤ *Tools* ➤ In PIM/Life menu, *Calendar* ➤ *Options* ➤ *Delete* ➤ *All This 6Months* ➤ *Yes*

## Tasks

### ■ Task List

Hiding tasks

*MENU* ➤ *Tools* ➤ In PIM/Life menu, *Tasks* ➤ Highlight task ➤ *Options* ➤ *Edit* ➤ *Secret:* ➤ *On* ➤ *Save*

### ■ Saving/Editing Tasks

Editing tasks

*MENU* ➤ *Tools* ➤ In PIM/Life menu, *Tasks* ➤ Highlight task ➤ *Options* ➤ *Edit* ➤ Select item ➤ Edit in the same manner as saving tasks ➤ *Save*

Setting priority

*MENU* ➤ *Tools* ➤ In PIM/Life menu, *Tasks* ➤ Highlight task ➤ *Options* ➤ *Edit* ➤ *Priority:* ➤ Select priority ➤ *Save*

Setting Alarm tone/video & duration

**[Start Here]** *MENU* ➤ *Tools* ➤ In PIM/Life menu, *Tasks* ➤ Highlight task ➤ *Options* ➤ *Edit* ➤ *Alarm:* ➤ See below

#### Alarm Tone/Video

*Assign Tone/Video:* ➤ Select folder ➤ Select tone/file ➤ *Confirm* ➤ *Save*  
• Select start point if required.

#### Duration

*Duration:* ➤ Select time ➤ *Confirm* ➤ *Save*

Setting Alarm volume

*MENU* ➤ *Tools* ➤ In PIM/Life menu, *Tasks* ➤ *Options* ➤ *Alarm Settings* ➤ *Alarm Volume:* ➤ Adjust level ➤ *Accept*

Selecting Vibration option	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Tasks</i> ➤ <i>Options</i> ➤ <i>Alarm Settings</i> ➤ <i>Vibration:</i> ➤ Select option
Sounding Alarm tone even in Manner mode	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Tasks</i> ➤ <i>Options</i> ➤ <i>Alarm Settings</i> ➤ <i>For Manner Mode:</i> ➤ <i>Ring</i> ➤ <i>Yes</i>
<b>■ Managing Tasks</b>	
Searching tasks	<small>(Start Here)</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Tasks</i> ➤ <i>Options</i> ➤ <i>Find</i> ➤ See below
	<i>By Part of Subject</i> <i>By Subject</i> ➤ Enter text ➤ <i>Done</i>
	<i>By Due Date</i> <i>By Due Date</i> ➤ Enter date ➤ <i>Accept</i>
Sorting tasks by priority	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Tasks</i> ➤ <i>Options</i> ➤ <i>Sort</i> ➤ <i>Priority</i>
Checking memory status	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Tasks</i> ➤ <i>Options</i> ➤ <i>Memory Status</i>
Deleting all tasks	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Tasks</i> ➤ <i>Options</i> ➤ <i>Delete</i> ➤ <i>All Tasks</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ <i>Yes</i>

## Alarms

Editing entries	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Alarms</i> ➤ Select entry ➤ Select item ➤ Edit in the same manner as saving entries ➤ <i>Save</i>
Saving entry name	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Alarms</i> ➤ Select entry ➤ <i>Subject:</i> ➤ Enter name ➤ <i>Done</i> ➤ <i>Save</i>
Setting Alarm tone/video	<small>(Start Here)</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Alarms</i> ➤ Select entry ➤ <i>Assign Tone/Video:</i> ➤ See below
	<i>Using Preset Tone or Data Folder File</i> Select folder ➤ Select tone/file ➤ <i>Save</i> ● Select start point if required.
	<i>Using Customized Screen Tone/Video</i> <i>Customized Screen</i> ➤ <i>Save</i>
Setting handset to vibrate at Alarm Time	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Alarms</i> ➤ Select entry ➤ <i>Vibration:</i> ➤ <i>On or Link to Sound</i> ➤ <i>Save</i> ● Select <i>Link to Sound</i> to allow compatible SMAF files to control vibration.
Sounding Alarm tone even in Manner mode	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Alarms</i> ➤ <i>Settings</i> ➤ <i>For Manner Mode</i> ➤ <i>Ring</i> ➤ <i>Yes</i>
Activating Alarm based on World Clock time	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Alarms</i> ➤ <i>Settings</i> ➤ <i>Link to World Clk</i> ➤ <i>On</i>

## Wakeup TV

Editing entries	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Wakeup TV</i> ➤ Select entry ➤ Select item ➤ Edit in the same manner as saving entries ➤ <i>Save</i>
Setting Alarm tone/video	<p><small>Start Here</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Wakeup TV</i> ➤ Select entry ➤ <i>Assign Tone/Video</i>: ➤ See below</p> <p>Using <i>Preset Tone or Data Folder File</i>            Select folder ➤ Select tone/file ➤ <i>Save</i>            • Select start point if required.</p> <p>Using <i>Customized Screen Tone/Video</i>  <i>Customized Screen</i> ➤ <i>Save</i></p>
Sounding Alarm tone even in Manner mode	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Wakeup TV</i> ➤ <i>For Manner Mode</i> ➤ <i>Ring</i> ➤ <i>Yes</i>

## Calculator

Copying calculation results	While result appears, <i>Options</i> ➤ <i>Copy</i>
Changing exchange rate for currency conversion	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calculator</i> ➤ <i>Options</i> ➤ <i>Money Converter</i> ➤ <i>Exchange Rate</i> ➤ <i>Domestic or Foreign</i> ➤ Enter rate ➤ <i>Accept</i>
Converting currencies	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Calculator</i> ➤ Enter amount of money ➤ <i>Options</i> ➤ <i>Money Converter</i> ➤ <i>To Domestic or To Foreign</i> • Set Exchange Rate first.

## Expenses Memo

Changing Category of saved entry	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Expenses Memo</i> ➤ <i>Totals</i> ➤ Select entry ➤ Select Category
Changing amount	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Expenses Memo</i> ➤ <i>Totals</i> ➤ Highlight entry ➤ <i>Options</i> ➤ <i>Change Amount</i> ➤ <i>Edit</i> ➤ <i>Accept</i>
Renaming Categories	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Expenses Memo</i> ➤ <i>Edit Category</i> ➤ Select Category ➤ Enter name ➤ <i>Done</i>

## Osaifu-Keitai®

Enabling to view e-money balances	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Osaifu-Keitai</i> ➤ <i>IC Card Settings</i> ➤ <i>Balance Info</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ <i>&lt;Empty&gt;</i> ➤ <i>S! Appli or Lifestyle-Appli</i> ➤ Select application • For use with compatible Lifestyle-Applications. • Start Lifestyle-Appli once before adding it to Balance Info list.
Moving applications up/down Balance Info list	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Osaifu-Keitai</i> ➤ <i>IC Card Settings</i> ➤ <i>Balance Info</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ Highlight application ➤ <i>Options</i> ➤ <i>Move</i> ➤ Select target location
Removing applications from Balance Info list	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Osaifu-Keitai</i> ➤ <i>IC Card Settings</i> ➤ <i>Balance Info</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ Highlight application ➤ <i>Options</i> ➤ <i>Delete</i>

Customizing handset response to reader/writer commands	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Osaifu-Keitai</i> ➤ <i>IC Card Settings</i> ➤ <i>Interface Settings</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ Select item ➤ <i>Off</i>
Opening IC Card properties	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Osaifu-Keitai</i> ➤ <i>IC Card Settings</i> ➤ <i>IC Card Status</i>
Setting IC Card Lock notice recipient	<p><small>[Start Here]</small> <i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Osaifu-Keitai</i> ➤ <i>IC Card Settings</i> ➤ <i>Remote Lock</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ <i>Mail Remote Lock</i> ➤ <i>Notice Settings</i> ➤ <i>Send Notice</i> ➤ See below</p> <p><b>Setting Recipient</b></p> <p>To Set Recipient ➤ Set Recipient ➤ Select method ➤ Select/enter number/address ➤ <i>CLEAR/BACK</i> ➤ <i>Save</i></p> <ul style="list-style-type: none"> <li>• Omit step of tapping <i>CLEAR/BACK</i> when selecting <i>Phone Book</i> as setting method.</li> </ul> <p><b>Disabling Notice</b></p> <p><i>Off</i> ➤ <i>CLEAR/BACK</i> ➤ <i>Save</i></p>
Setting required Missed Call count for Call Remote Lock	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Osaifu-Keitai</i> ➤ <i>IC Card Settings</i> ➤ <i>Remote Lock</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ <i>Call Remote Lock</i> ➤ <i>Count for Lock</i> ➤ Enter Missed Call count ➤ <i>Accept</i> ➤ <i>Save</i>
Restoring default Osaifu-Keitai® settings	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Osaifu-Keitai</i> ➤ <i>IC Card Settings</i> ➤ <i>Set to Default</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ <i>Yes</i>

## Simulated Call

Starting via Simulated Call menu	<p><i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Simulated Call</i> ➤ <i>Receive Simulated Call</i> ➤ <i>Yes</i></p> <ul style="list-style-type: none"> <li>• Simulated Call starts immediately regardless of Receive Timing setting.</li> <li>• Settings remain even after starting Simulated Call during setup.</li> </ul>
Clearing caller information	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Simulated Call</i> ➤ <i>Set Caller</i> ➤ <i>Reset</i> ➤ <i>Yes</i> ➤ <i>OK</i> ➤ <i>Save</i>
Overriding Silent volume setting	<i>MENU</i> ➤ <i>Tools</i> ➤ In PIM/Life menu, <i>Simulated Call</i> ➤ <i>For Silent Mode</i> ➤ <i>Ring</i> ➤ <i>Yes</i> ➤ <i>Save</i>

## Hour Minder

Setting Hour Minder tone/video	<p><i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>Hour Minder</i> ➤ <i>Advanced</i> ➤ <i>Assign Tone/Video:</i> ➤ Select folder ➤ Select tone/file ➤ <i>Confirm</i> ➤ <i>Save</i></p> <ul style="list-style-type: none"> <li>• Select start point if required.</li> </ul>
Setting handset to vibrate at Hour Minder Time	<p><i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>Hour Minder</i> ➤ <i>Advanced</i> ➤ <i>Vibration:</i> ➤ <i>On</i> or <i>Link to Sound</i> ➤ <i>Confirm</i> ➤ <i>Save</i></p> <ul style="list-style-type: none"> <li>• Select <i>Link to Sound</i> to allow compatible SMAF files to control vibration.</li> </ul>
Sounding Hour Minder tone even in Manner mode	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>Hour Minder</i> ➤ <i>Advanced</i> ➤ <i>For Manner Mode:</i> ➤ <i>Ring</i> ➤ <i>Yes</i> ➤ <i>Confirm</i> ➤ <i>Save</i>

Activating Hour Minder based on World Clock time	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>Hour Minder</i> ➤ <i>Advanced</i> ➤ <i>Link to World Clk:</i> ➤ <i>On</i> ➤ <i>Confirm</i> ➤ <i>Save</i>
--	---

## Pedometer

Setting Pedometer indicator	<i>MENU</i> ➤ <i>Settings</i> ➤ In Sound/Display menu, <i>Display</i> ➤ <i>Standby Display</i> ➤ <i>Pedometer</i> ➤ Select item
Using Pedometer Calendar	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>Pedometer</i> ➤ <i>Pedometer Calendar</i> ➤ Select date • Degree of achievement appears.
Checking accumulated data	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>Pedometer</i> ➤ <i>Accumulated Data</i> • Change in body information is reflected in the data.
Resetting accumulated data	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>Pedometer</i> ➤ <i>Accumulated Data</i> ➤ <i>Options</i> ➤ <i>Reset Walk Data</i> ➤ Enter Handset Code ➤ <i>OK</i> ➤ <i>Yes</i> • Averages are also reset.

## Customizing achievement notice

[Start Here] *MENU* ➤ *Tools* ➤ *Clock/Gauge* tab ➤ *Pedometer* ➤ *Settings* ➤ *Target* ➤ *Goal Announce* ➤ *On* ➤ See below

### Setting Tone

*Goal Sound* ➤ Select pattern

### Setting Tone Volume

*Goal Volume* ➤ Adjust level ➤ *Accept*

### Selecting Vibration Option

*Vibration* ➤ Select option

### Setting Duration

*Duration* ➤ Select time  
• For custom Duration, tap *Other*.

## S! GPS Navi

## Sending current location via mail

*MENU* ➤ *Tools* ➤ *Clock/Gauge* tab ➤ *S! GPS Navi* ➤ *Location Mail* ➤ Positioning complete ➤ *OK* ➤ Complete message ➤ *Send*  
• When accuracy level is 1 or 2, tap *No* after positioning, then complete message.

## Setting map source URL

[Start Here] *MENU* ➤ *Tools* ➤ *Clock/Gauge* tab ➤ *S! GPS Navi* ➤ *NAVI Settings* ➤ *Map URL Settings* ➤ See below

### Adding URLs

<Not set> ➤ Enter URL ➤ *Done*

### Setting Destination URL

Select URL

### Viewing/Editing/Deleting URLs

Highlight URL ➤ *Options* ➤ *Display*, *Edit* or *Delete*

• Follow onscreen prompt.

Disabling positioning	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>S! GPS Navi</i> ➤ <i>NAVI Settings</i> ➤ <i>Positioning Lock</i> ➤ <i>On</i> ➤ Enter Handset Code ➤ <i>OK</i>
Selecting Location Information transmission option	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>S! GPS Navi</i> ➤ <i>NAVI Settings</i> ➤ <i>Send Location Info</i> ➤ Select option
Using My Location & Location Log	<i>[Start Here]</i> <i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>S! GPS Navi</i> ➤ <i>My Location List or Location Logs</i> ➤ Highlight entry or record ➤ See below
	<b>Opening Map</b> <i>Map</i> ➤ <i>Yes</i>
	<b>Showing Routes via Navi Appli</b> <i>Options</i> ➤ <i>Go to</i> ➤ <i>Yes</i> • Follow onscreen instructions.
	<b>Inserting into Message Text</b> <i>Options</i> ➤ <i>As Msg. Text</i> ➤ Complete message ➤ <i>Send</i>
	<b>Saving to Phone Book</b> <i>Options</i> ➤ <i>Save to Ph.Book</i> ➤ <i>As New Entry</i> ➤ Complete other fields ➤ <i>Save</i> • To add to an existing entry, select <i>As New Detail</i> .
Saving Location Log records to My Location	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>S! GPS Navi</i> ➤ <i>Location Logs</i> ➤ Highlight record ➤ <i>Options</i> ➤ <i>Set as My Location</i> ➤ <i>Name</i> ➤ Enter name ➤ <i>Done</i> ➤ <i>Save</i>
Deleting Location Log records	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>S! GPS Navi</i> ➤ <i>Location Logs</i> ➤ Highlight record ➤ <i>Options</i> ➤ <i>Delete</i> or <i>Delete All</i> ➤ <i>Yes</i> • Omit record selection step when deleting all records.





Suppressing Information window after sending Location Information automatically	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Clock/Gauge</i> tab ➤ <i>S! GPS Navi</i> ➤ <i>NAVI Settings</i> ➤ <i>Inform Location</i> ➤ <i>Do not Show</i> ➤ Enter Handset Code ➤ <i>OK</i>
---	--

## Notepad

Editing Notepad	<i>[Start Here]</i> <i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec.</i> tab ➤ <i>Notepad</i> ➤ Highlight entry ➤ <i>Options</i> ➤ See below
	<b>Editing Text</b> <i>Edit Text</i> ➤ <i>Edit</i> ➤ <i>Done</i>
	<b>Setting Category</b> <i>Change Category</i> ➤ Select Category
Searching text within all entries	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec.</i> tab ➤ <i>Notepad</i> ➤ Highlight entry ➤ <i>Options</i> ➤ <i>Search</i> ➤ Enter text ➤ <i>Done</i>
Inserting Notepad text into message text	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec.</i> tab ➤ <i>Notepad</i> ➤ Highlight entry ➤ <i>Options</i> ➤ <i>Send</i> ➤ <i>As Message Text</i> ➤ <i>S! Mail</i> or <i>SMS</i> ➤ Complete message ➤ <i>Send</i> • <i>S! Mail</i> Composition window opens automatically depending on character count.
Sending entries via <i>S! Mail</i>	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec.</i> tab ➤ <i>Notepad</i> ➤ Highlight entry ➤ <i>Options</i> ➤ <i>Send</i> ➤ <i>Via Message</i> ➤ Complete message ➤ <i>Send</i>
Creating text files	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec.</i> tab ➤ <i>Notepad</i> ➤ Highlight entry ➤ <i>Options</i> ➤ <i>Setting/Manage</i> ➤ <i>Create Text File</i> ➤ Enter name ➤ <i>Done</i> ➤ <i>Save here</i>

Importing text files	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Notepad</i> ➤ <i>Highlight entry</i> ➤ <i>Options</i> ➤ <i>Setting/Manage</i> ➤ <i>Import Text File</i> ➤ Select file
Checking memory status	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Notepad</i> ➤ <i>Highlight entry</i> ➤ <i>Options</i> ➤ <i>Setting/Manage</i> ➤ <i>Memory Status</i>
Opening properties	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Notepad</i> ➤ <i>Highlight entry</i> ➤ <i>Options</i> ➤ <i>Details</i>

## Voice Recorder

Saving longer recordings	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Voice Recorder</i> ➤ <i>Options</i> ➤ <i>Record Time</i> ➤ <i>Extended Voice</i> ➤  ➤ Recording starts ➤  ➤ Recording ends <ul style="list-style-type: none"> <li>Insert Memory Card to record in <i>Extended Voice</i> mode. (Recording is saved automatically.)</li> </ul>
Sending Voice files via S! Mail	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Voice Recorder</i> ➤  ➤ Recording starts ➤  ➤ Recording ends ➤ <i>Save and Send</i> ➤ Complete message ➤ <i>Send</i> <ul style="list-style-type: none"> <li>Available in <i>For Message</i> mode.</li> </ul>
Switching storage media	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Voice Recorder</i> ➤ <i>Options</i> ➤ <i>Save Recording to</i> ➤ Select option <ul style="list-style-type: none"> <li>Available in <i>For Message</i> mode.</li> <li>Set to <i>Ask Each Time</i> to select media after every recording.</li> </ul>

## Scan Barcode

Scanning during text entry	<small>Start Here</small> In a text entry window, <i>Options</i> ➤ <i>Scan</i> ➤ <i>Scan Code</i> ➤ Frame barcode in center of Display ➤ <i>Scan</i> ➤ See below
	<b>Pasting All Scan Results</b> OK
	<b>Pasting a Part of Scan Results</b> <i>Cut</i> ➤ Highlight first character ➤ <i>Start</i> ➤ Highlight text range ➤ <i>End</i>
Scanning continuously	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Scan Barcode</i> ➤ <i>Options</i> ➤ <i>Continuous Scan</i> ➤ <i>On</i> ➤ Frame barcode in center of Display ➤ <i>Scan</i> <ul style="list-style-type: none"> <li>Tap <i>Yes</i> to continue scanning or <i>No</i> to view scan results.</li> </ul>
Reading saved barcode images	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Open Barcode</i> ➤ Select file
Saving scan results	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Scan Barcode</i> ➤ Frame barcode in center of Display ➤ <i>Scan</i> ➤ <i>Options</i> ➤ <i>Save</i>
Saving to Notepad	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Scan Barcode</i> ➤ Frame barcode in center of Display ➤ <i>Scan</i> ➤ <i>Options</i> ➤ <i>Notepad</i>

Saving linked info to Phone Book	<p><b>MENU</b> ➤ <b>Tools</b> ➤ <b>Doc./Rec. tab</b> ➤ <b>Barcode/Scan</b> ➤ <b>Scan Barcode</b> ➤ Frame barcode in center of Display ➤ <b>Scan</b> ➤ Highlight number or mail address ➤ <b>Options</b> ➤ <b>Save to Ph.Book</b> ➤ <b>As New Entry</b> ➤ Complete other fields ➤ <b>Save</b></p> <ul style="list-style-type: none"> <li>• To add to an existing entry, select <b>As New Detail</b>.</li> <li>• When <b>MEMORY:</b> appears in scan results, tap highlighted text to enter the items underlined with a dotted line automatically in Phone Book entry window.</li> </ul>
Opening saved scan results	<p><b>MENU</b> ➤ <b>Tools</b> ➤ <b>Doc./Rec. tab</b> ➤ <b>Barcode/Scan</b> ➤ <b>Scanned Results</b> ➤ Select file</p> <ul style="list-style-type: none"> <li>• Highlight a file and tap <b>Options</b> to rename files, open properties or delete files.</li> <li>• Some files may not open.</li> </ul>
Using linked info	<p><small>[Start Here]</small> <b>MENU</b> ➤ <b>Tools</b> ➤ <b>Doc./Rec. tab</b> ➤ <b>Barcode/Scan</b> ➤ <b>Scan Barcode</b> ➤ Frame barcode in center of Display ➤ <b>Scan</b> ➤ See below</p>
	<p><b>Dialing Numbers</b> Select phone number ➤ <b>Call</b></p>
	<p><b>Sending Messages</b> Select mail address ➤ Complete message ➤ <b>Send</b></p> <ul style="list-style-type: none"> <li>• When <b>MAILTO:</b> appears in scan results, tap highlighted text to enter the items underlined with a dotted line automatically in Mail Composition window.</li> </ul>
	<p><b>Accessing Internet Sites</b> Tap URL</p>

Using images as Wallpaper	<p><b>MENU</b> ➤ <b>Tools</b> ➤ <b>Doc./Rec. tab</b> ➤ <b>Barcode/Scan</b> ➤ <b>Scan Barcode</b> ➤ Frame barcode in center of Display ➤ <b>Scan</b> ➤ Highlight image ➤ <b>Options</b> ➤ <b>Set as Wallpaper</b> ➤ <b>Vertical or Horizontal</b> ➤ <b>Assign</b></p> <ul style="list-style-type: none"> <li>• For images smaller or larger than Display, Wallpaper Display options appear; follow onscreen prompts.</li> </ul>
Saving images & melodies	<p><b>MENU</b> ➤ <b>Tools</b> ➤ <b>Doc./Rec. tab</b> ➤ <b>Barcode/Scan</b> ➤ <b>Scan Barcode</b> ➤ Frame barcode in center of Display ➤ <b>Scan</b> ➤ Highlight file ➤ <b>Options</b> ➤ <b>To Data Folder</b></p>
Opening or playing files	<p><b>MENU</b> ➤ <b>Tools</b> ➤ <b>Doc./Rec. tab</b> ➤ <b>Barcode/Scan</b> ➤ <b>Scan Barcode</b> ➤ Frame barcode in center of Display ➤ <b>Scan</b> ➤ Select file</p>
Using images for System Graphics	<p><b>MENU</b> ➤ <b>Tools</b> ➤ <b>Doc./Rec. tab</b> ➤ <b>Barcode/Scan</b> ➤ <b>Scan Barcode</b> ➤ Frame barcode in center of Display ➤ <b>Scan</b> ➤ Highlight image ➤ <b>Options</b> ➤ <b>As System</b> ➤ Select item ➤ Specify image area ➤ <b>Assign</b></p> <ul style="list-style-type: none"> <li>• Some images may be usable without specifying image area.</li> </ul>



Pasting to message text	<p><b>Start Here</b> MENU ➤ Tools ➤ Doc./Rec. tab ➤ Barcode/Scan ➤ Scan Barcode ➤ Frame barcode in center of Display ➤ Scan ➤ Options ➤ Send Message ➤ See below</p>
	<p><b>All Text</b> OK ➤ S! Mail or SMS ➤ Complete message ➤ Send</p> <ul style="list-style-type: none"> <li>• S! Mail Composition window opens automatically depending on character count.</li> </ul>
	<p><b>Selected Text</b> Cut ➤ Highlight first character ➤ Start ➤ Highlight text range ➤ End ➤ S! Mail or SMS ➤ Complete message ➤ Send</p> <ul style="list-style-type: none"> <li>• S! Mail Composition window opens automatically depending on character count.</li> </ul>
Copying text	<p><b>Start Here</b> MENU ➤ Tools ➤ Doc./Rec. tab ➤ Barcode/Scan ➤ Scan Barcode ➤ Frame barcode in center of Display ➤ Scan ➤ See below</p>
	<p><b>Text</b> Options ➤ Copy ➤ Highlight first character ➤ Start ➤ Highlight text range ➤ End</p>
	<p><b>Number, Address or URL</b> Highlight number, mail address or URL ➤ Options ➤ Copy Telephone or Copy Address or Copy URL</p>

## Scan Card

Saving to Notepad	<p>MENU ➤ Tools ➤ Doc./Rec. tab ➤ Barcode/Scan ➤ Scan Card ➤ Frame card in center of Display ➤ Read ➤ Scan ➤ Options ➤ Notepad</p>
Pasting to message text	<p><b>Start Here</b> MENU ➤ Tools ➤ Doc./Rec. tab ➤ Barcode/Scan ➤ Scan Card ➤ Frame card in center of Display ➤ Read ➤ Scan ➤ Options ➤ Send Message ➤ See below</p>
	<p><b>All Text</b> OK ➤ S! Mail or SMS ➤ Complete message ➤ Send</p> <ul style="list-style-type: none"> <li>• S! Mail Composition window opens automatically depending on character count.</li> </ul>
	<p><b>Selected Text</b> Cut ➤ Highlight first character ➤ Start ➤ Highlight text range ➤ End ➤ S! Mail or SMS ➤ Complete message ➤ Send</p> <ul style="list-style-type: none"> <li>• S! Mail Composition window opens automatically depending on character count.</li> </ul>
Copying text	<p>MENU ➤ Tools ➤ Doc./Rec. tab ➤ Barcode/Scan ➤ Scan Card ➤ Frame card in center of Display ➤ Read ➤ Scan ➤ Options ➤ Copy ➤ Highlight first character ➤ Start ➤ Highlight text range ➤ End</p>

## Scan Text

Scanning and pasting during text entry	In a text entry window, <i>Options</i> ➤ <i>Scan</i> ➤ <i>Scan Text</i> ➤ Frame text in center of Display ➤ <i>Scan</i> ➤ Select line ➤ <i>Select</i> ➤ <i>OK</i>
Scanning more text	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Scan Text</i> ➤ Frame text in center of Display ➤ <i>Scan</i> ➤ Select line ➤ <i>Select</i> ➤ <i>OK</i> ➤ <i>Options</i> ➤ <i>Continue Part</i> or <i>Scan More</i> <ul style="list-style-type: none"> <li>Select <i>Continue Part</i> to enter additional text or <i>Scan More</i> to enter text after a line break.</li> </ul>
Saving scan results	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Scan Text</i> ➤ Frame text in center of Display ➤ <i>Scan</i> ➤ Select line ➤ <i>Select</i> ➤ <i>OK</i> ➤ <i>Options</i> ➤ <i>Save</i>
Saving linked info to Phone Book	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Scan Text</i> ➤ Frame text in center of Display ➤ <i>Scan</i> ➤ Select line ➤ <i>Select</i> ➤ <i>OK</i> ➤ Highlight number or mail address ➤ <i>Options</i> ➤ <i>Save to Ph.Book</i> ➤ <i>As New Entry</i> ➤ <i>Complete other fields</i> ➤ <i>Save</i> <ul style="list-style-type: none"> <li>To add to an existing entry, select <i>As New Detail</i>.</li> </ul>
Opening saved scan results	<i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Scanned Results</i> ➤ Select file <ul style="list-style-type: none"> <li>Highlight a file and tap <i>Options</i> to rename files, open properties or delete files.</li> <li>Some files may not open.</li> </ul>

## Using linked info

[Start Here] *MENU* ➤ *Tools* ➤ *Doc./Rec. tab* ➤ *Barcode/Scan* ➤ *Scan Text* ➤ Frame text in center of Display ➤ *Scan* ➤ Select line ➤ *Select* ➤ *OK* ➤ See below

## Dialing Numbers

Select phone number ➤ *Call*

## Sending Messages

Select mail address ➤ Complete message ➤ *Send*

## Accessing Internet Sites

Tap URL

## Pasting to message text

[Start Here] *MENU* ➤ *Tools* ➤ *Doc./Rec. tab* ➤ *Barcode/Scan* ➤ *Scan Text* ➤ Frame text in center of Display ➤ *Scan* ➤ Select line ➤ *Select* ➤ *OK* ➤ *Options* ➤ *Send Message* ➤ See below

## All Text

*OK* ➤ *S! Mail* or *SMS* ➤ Complete message ➤ *Send*

- S! Mail Composition window opens automatically depending on character count.

## Selected Text

*Cut* ➤ Highlight first character ➤ *Start* ➤ Highlight text range ➤ *End* ➤ *S! Mail* or *SMS* ➤ Complete message ➤ *Send*

- S! Mail Composition window opens automatically depending on character count.

Copying text	<p><small>[Start Here]</small> <i>MENU</i> ➤ <i>Tools</i> ➤ <i>Doc./Rec. tab</i> ➤ <i>Barcode/Scan</i> ➤ <i>Scan Text</i> ➤ Frame text in center of Display ➤ <i>Scan</i> ➤ Select line ➤ <i>Select</i> ➤ <i>OK</i> ➤ See below</p>
	<p><b>Text</b>  <i>Options</i> ➤ <i>Copy</i> ➤ Highlight first character ➤ <i>Start</i> ➤ Highlight text range ➤ <i>End</i></p>
	<p><b>Number, Address or URL</b>  Highlight number, mail address or URL ➤  <i>Options</i> ➤ <i>Copy Telephone</i> or <i>Copy Address</i> or <i>Copy URL</i></p>

## Kanji Grabber


Scanning and pasting during text entry	<p>In a text entry window, <i>Options</i> ➤ <i>Scan</i> ➤ <i>Kanji Grabber</i> ➤ Frame kanji in Loupe ➤ <i>Select</i> ➤ Scan results appear ➤ <i>Select</i></p>
--	---

## Osaifu-Keitai®

### ? Cannot use Osaifu-Keitai® (SI FeliCa)

- Battery may be low. Charge battery or install a charged battery.

### ? Recognition via reader/writer takes time

- Check  logo area. Foreign articles can block/hamper recognition.

### ? Call Remote Lock does not activate even after specified number of Missed Calls

- Missed Call count is reset by calls from other numbers. If series is interrupted, start over from the beginning.
- When Call Forwarding is active, Missed Calls may not be recorded.

## Wakeup TV

### ? TV does not activate with specified channel

- If Wakeup TV Time arrives while TV is active, channel does not switch to the specified one.

## Voice Recorder

### ? Cannot record properly

- If incompatible microphone is connected, recording may fail.

### ? Noise/skipping occurs

- Avoid shocks to handset while recording; may cause noise or skipping.

### ? Recording takes time to start

- Recording window may take longer to open as more Voice files are saved on Memory Card.

## Scanning Barcode/Card/Text

### ? Cannot read barcodes properly

- Scan may fail if barcode is dirty or unclear.
- Scan may fail if barcode is scanned under inadequate light.
- Scan may fail if multiple barcodes are captured at one time.

### ? Cannot read barcodes during text entry

- Scanning is not available during calls or when mobile camera is active.

### ? Cannot read barcode images in Data Folder automatically

- When scan fails, follow onscreen instructions and select next barcode image manually.

### ? Cannot scan business cards properly

- Scan fails if business card is printed in light-colored text on a dark background, handwritten or printed in casual/decorative fonts, decorated with a background pattern, or designed with both vertical and horizontal text.
- Scan may fail if business card is printed in light-colored text on a light background, printed in italics or extremely small fonts, decorated with a logo or logo-like text, printed on a glossy paper or other material, or dirty/folded.

### ? Cannot scan text properly

- Scanning over 35 characters at one time may yield poor results.
- Adjust to frame text in [ ]. Letters at the ends may be distorted.